






4 K系列 斜齿-螺旋锥齿轮减速机


K series helical-bevel gear units

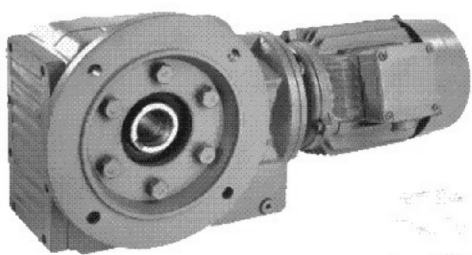


K




KA




KF




KAF





KAT




KA




KAZ

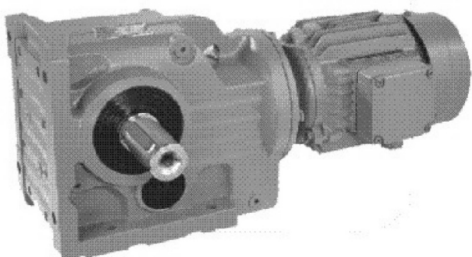


Y




AI




AS



AJ



R



AL

其它连接方式
Other join way



4.1 K系列斜齿-锥齿轮减速机概述:


- 1) 垂直输出、结构紧凑, 高精度、硬齿面的齿轮保证了工作平稳、噪音低、寿命长、和大的传递扭矩。
- 2) 安装方式: 底座安装、法兰安装、扭力臂安装、小法兰安装。
- 3) 减速比: 基本型二级8.1-191, 组合型至13459。
- 4) 输出方式: 空心轴输出或实心轴输出。
- 5) 平均数为94%, K/R组合平均效率为85%。

4.1 Kseries helical-bevel gear units overview:

- 1) Right-angled output, structure compact, rigid tooth flank carrying greater torque, high precision gear ensuring unit to operate stably, noise low, lifetime long.
- 2) Mounting mode: foot-mounted, flange-mounted, torque arm-mounted, small flange-mounted,
- 3) ratio: ratio or basic type is 8.1-191, ratio of combination is up to 13459.
- 4) Output mode: hollow shaft output or solid shaft output.
- 5) Average efficiency: average efficiency 94%, F/R 85%.

4.2 K系列减速机形式表示方法:

4.2 K series model expressing example:

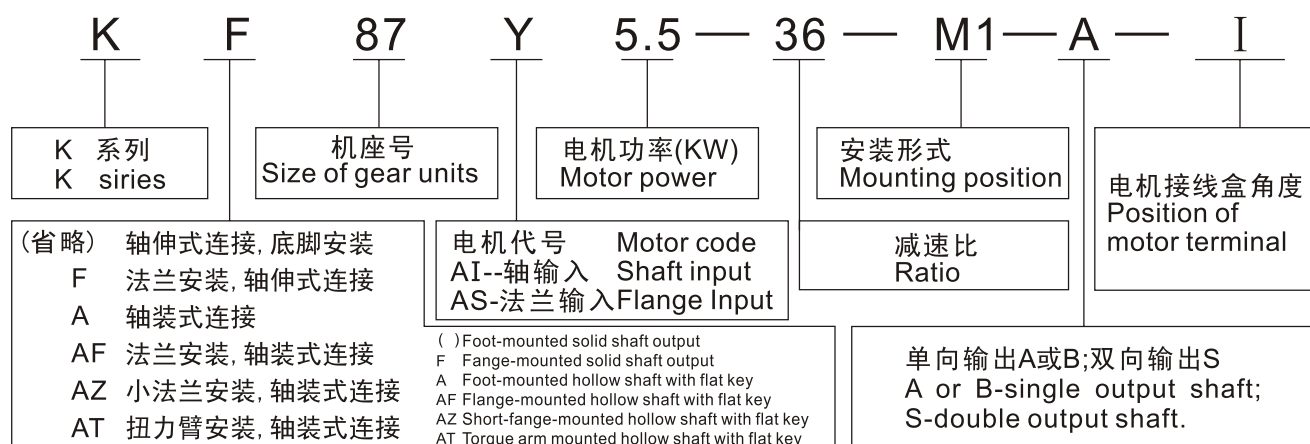

4.3 K系列减速机重量表:

4.4 K series weight table:

Type	K37	K47	K57	K67	K77	K87	K97	K107	K127	K157	K167	K187
m (kg)	12	20	27	33	57	85	150	250	410	666	1036	1700

注: 带输入轴、输入法兰另加12%; 带电机根据所配电机规格另加。 Note: Weight of reducer with input shaft and input flange should be added 12%; If there is a motor, please add weight according to motor type.


4.4 K系列减速机油量表:

4.4 K series oil capacity:

Mounting position Type	M1	M2	M3	M4	M5	M6
K37	0.5	1.1	1.1	1.5	1	1
K47	0.8	1.3	1.7	2.2	1.6	1.6
K57	1.3	2.3	2.7	3	2.9	2.7
K67	1.1	2.4	2.8	3.6	2.7	2.7
K77	2.2	4.1	4.6	6	4.5	4.5
K87	3.7	8.2	9	11.9	8.4	8.4
K97	7	14.7	17.3	21.5	15.7	16.5
K107	10	22	26	35	25	25
K127	21	41.5	46	55	41	41
K157	31	66	69	92	62	62
K167	35	100	100	125	85	85
K187	60	170	170	205	130	130




4.5 K系列安装形式:

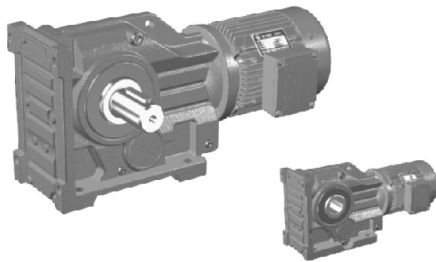

K系列减速机有以下设计方案:


K series gear units are available in the following designs:

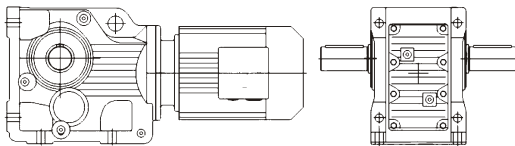

K.Y..

底脚轴伸式安装螺旋锥齿轮减速机


Foot-mounted helical-bevel gear units with solid shaft



KAB...Y..

底脚空心轴安装螺旋锥齿轮减速机


Foot-mounted helical-bevel gear units with hollow shaft



KA...Y..

空心轴安装螺旋锥齿轮减速机


Helical-bevel gear units with hollow shaft

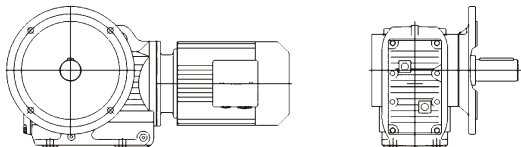

KF...Y..

法兰轴伸式安装螺旋锥齿轮减速机

Flange-mounted helical-bevel gear units with solid shaft

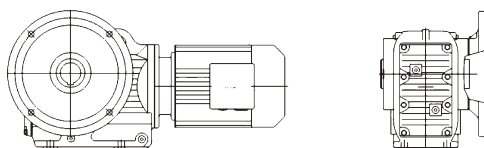


KAF...Y..

法兰空心轴安装螺旋锥齿轮减速机

Flange-mounted helical-bevel gear units with hollow shaft


4.5 K series mounting position:

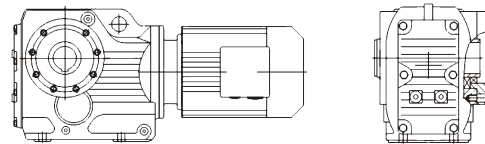

KAZ..Y..

小法兰空心轴安装螺旋锥齿轮减速机


Short-flange-mounted helical-bevel gear units with hollow shaft

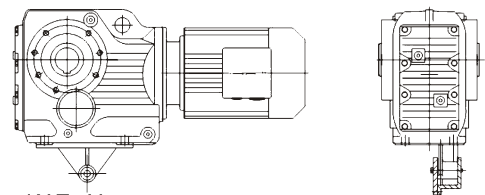

KAT..Y..

带防转臂空心轴安装螺旋锥齿轮减速机


Torque-arm-mounted helical-bevel gear units with hollow shaft

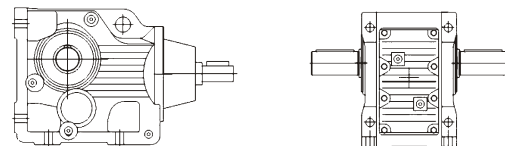

K (KF, KA, KAF, KAB, KAZ) S...

轴输入的螺旋锥齿轮减速机


Shaft input helical-bevel gear units

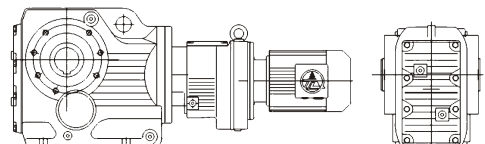

KA (K, KF, KAF, KAB, KAZ) ... R... Y...

组合式螺旋锥齿轮减速机


Combinatorial helical-bevel gear units

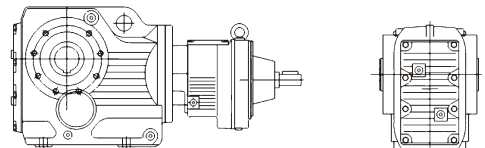

KA (K, KF, KAF, KAB, KAZ) S... R...

轴输入的组合式螺旋锥齿轮减速机

Shaft input combinatorial helical-bevel gear units

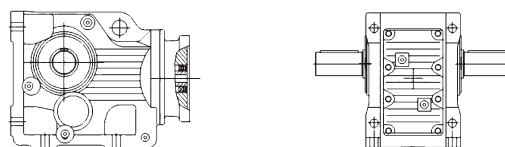

KA (K, KF, KAF, KAB, KAZ) ... Y...



电机用户自配或配特殊电机时需加联接法兰

When equipping the user's motor or the special one, the flange is required to be connected




K系列安装形式:

K series mounting position:

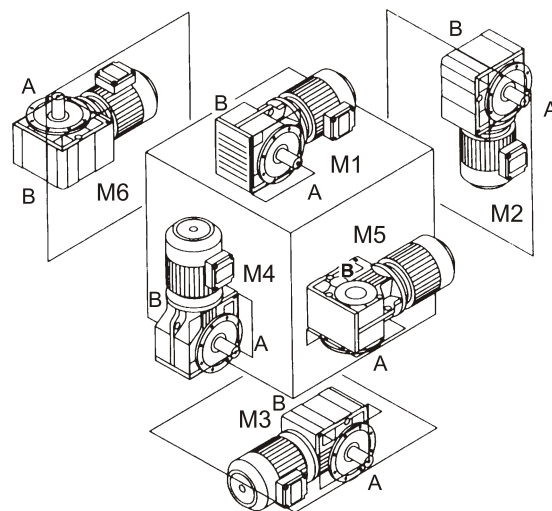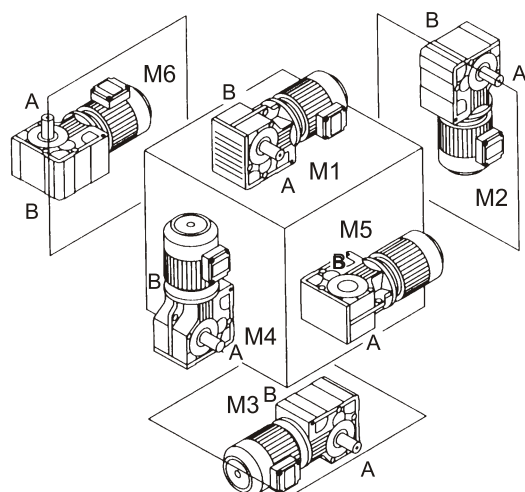


电机接线盒位置


Position of the motor terminal box




I



II



III



IV

输入功率及最大转矩*

Input power rating and maximum torque

规格 Size	37	47	57	67	77	87	97	107	127	157	167	187
结构形式 Structure	K KA KF KAF KAZ KAT KAB											
输入功率 Input power rating (kW)	0.18~3.0	0.18~3.0	0.18~5.5	0.18~5.5	0.37~11	0.75~22	1.1~30	3~45	7.5~90	11~160	11~200	18.5~200
传动比 Ratio	5.36~ 106.38	5.81~ 131.87	6.57~ 145.15	7.14~ 144.79	7.22~ 192.18	7.19~ 197.27	8.95~ 175.47	8.74~ 141.93	8.68~ 146.07	12.66~ 150.03	17.35~ 164.44	17.97~ 178.37
最大转矩* (N.m) Maximum torque	200	400	600	820	1550	2700	4300	8000	13000	18000	32000	50000



4.6 K系列选型参数表：

4.6 K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
0.18KW						0.18KW					
0.13	12013	10914	1.0	K 127R77-4 KA 127R77-4 KF 127R77-4 KAF127R77-4		2.9	521	473	1.1	K 57R37-4 KA 57R37-4 KF 57R37-4 KAF 57R37-4	
0.14	10807	9819	1.1			3.3	463	421	1.2		
0.16	9293	8443	1.3			3.8	398	362	1.4		
0.19	8236	7483	1.5			4.4	351	319	1.6		
0.21	7226	6565	1.7			5.1	300	273	1.9		
0.24	6388	5804	1.9			5.8	264	240	2.1		
0.28	5533	5027	2.2			6.5	237	215	2.4		
0.31	4868	4423	2.5			7.2	211	192	2.7		
0.37	4184	3801	2.9	K 107R77-4 KA 107R77-4 KF 107R77-4 KAF107R77-4		8.4	183	166	3.1	K 47R37 -4 KA 47R37 -4 KF 47R37 -4 KAF47R37 -4	
0.43	3563	3237	3.4			4.3	359	326	1.0		
0.19	7888	7167	1.0			4.8	318	289	1.2		
0.23	6711	6097	1.1			5.6	275	250	1.4		
0.25	6144	5582	1.2			6.2	248	225	1.5		
0.27	5575	5065	1.3			7.0	218	198	1.7		
0.32	4732	4299	1.6			8.3	184	167	2.0		
0.37	4135	3757	1.8			9.3	164	149	2.3		
0.43	3562	3236	2.1	K 97R57-4 KA 97R57-4 KF 97R57-4 KAF 97R57-4		11	141	128	2.7	K 37R17 -4 KA 37R17 -4 KF 37R17 -4 KAF37R17 -4	
0.48	3158	2869	2.4			8.7	176	160	1.07		
0.56	2756	2504	2.7			10	150	136	1.26		
0.63	2425	2203	3.1			11	140	127	1.34		
0.39	3944	3583	1.0			5.9	275	144.79	2.8		
0.45	3421	3108	1.2			6.9	235	123.54	3.3		
0.50	3035	2757	1.3			7.9	205	108.03	3.8		
0.57	2662	2419	1.5			8.3	195	102.62	4.0		
0.65	2337	2123	1.7	K 87R57-4 KA 87R57-4 KF 87R57-4 KAF 87R57-4		9.6	168	144.79	4.6	K 67 -4 KA 67 -4 KF 67 -4 KAF 67 -4	
0.75	2043	1856	2.0			11	144	123.54	5.4		
0.86	1789	1625	2.3			13	126	108.03	6.1		
0.97	1574	1430	2.6			5.9	276	145.14	2.0		
1.1	1388	1261	2.9			6.9	235	123.85	2.4		
1.3	1213	1102	3.3			7.8	206	108.29	2.7		
1.5	1053	957	3.8			8.3	196	102.88	2.9		
1.6	941	855	4.3			9.4	172	90.26	3.3		
1.9	818	743	4.9	K 77R37-4 KA 77R37-4 KF 77R37-4 KAF 77R37-4		9.6	169	145.14	3.3	K 57 -4 KA 57 -4 KF 57 -4 KAF 57 -4	
2.1	717	651	5.6			11	144	123.85	3.9		
0.67	2298	2088	1.1			13	126	108.29	4.5		
0.75	2041	1854	1.2			14	120	102.88	4.7		
0.84	1825	1658	1.4			15	105	90.26	5.4		
1.0	1557	1415	1.6			18	89	76.56	6.3		
1.1	1353	1229	1.9			6.4	251	131.87	1.50	K 47 -6 KA 47 -6 KF 47 -6 KAF 47 -6	
1.3	1187	1078	2.1			7.0	231	121.48	1.63		
1.5	1047	951	2.4			8.1	198	104.37	1.90		
1.7	921	837	2.8			9.4	173	90.86	2.2		
1.9	799	726	3.2			10	162	85.12	2.3		
1.0	1528	1388	1.0	K 67R37-4 KA 67R37-4 KF 67R37-4 KAF 67R37-4		11	153	131.87	2.5	K 37 -6 KA 37 -6 KF 37 -6 KAF 37 -6	
1.1	1341	1218	1.1			11	141	121.48	2.7		
1.3	1159	1053	1.3			13	121	104.37	3.1		
1.5	1017	924	1.4			15	106	90.86	3.6		
1.7	897	815	1.6			16	99	85.12	3.8		
2.0	780	709	1.9			8.7	186	97.81	1.01		
2.2	685	622	2.1			10	159	83.69	1.18		
2.5	608	552	2.4			12	138	72.54	1.36		
2.9	534	485	2.7	K 57R37-4 KA 57R37-4 KF 57R37-4 KAF 57R37-4		11	141	121.48	2.7	K 47 -4 KA 47 -4 KF 47 -4 KAF 47 -4	
3.2	471	428	3.1			13	121	104.37	3.1		
3.8	404	367	3.6			15	106	90.86	3.6		
2.0	767	697	1.0			16	99	85.12	3.8		
2.3	675	613	1.1			8.7	186	97.81	1.01		
2.6	597	542	1.3			10	159	83.69	1.18		
3.0	518	471	1.5			12	138	72.54	1.36		
3.3	462	420	1.7			11	141	121.48	2.7		
3.9	397	361	1.9			13	121	104.37	3.1		
4.3	356	323	2.2			15	106	90.86	3.6		
5.1	299	242	2.6			16	99	85.12	3.8		



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
0.18KW						0.25KW					
13	124	106.38	1.52			1.5	1413	924	1.0		
14	114	97.81	1.65			1.7	1246	815	1.2		
17	97	83.69	1.93			2.0	1084	709	1.3		
19	84	72.54	2.2			2.2	951	622	1.5		
21	79	67.80	2.4			2.5	844	552	1.7		
24	68	58.60	2.8			2.9	741	485	2.0	K	77R37-4
28	58	49.79	3.2			3.2	654	428	2.2	KA	77R37-4
31	52	44.46	3.6			3.9	547	358	2.7	KF	77R37-4
37	44	37.97	4.3			4.3	489	320	3.0	KAF	77R37-4
39	41	35.57	4.5	K	37 - 4	4.9	433	283	3.4		
46	35	29.96	5.4	KA	37 - 4	5.7	376	246	3.9		
48	34	28.83	5.6	KF	37 - 4	6.4	330	216	4.4		
56	29	24.99	6.5	KAF	37 - 4	7.3	292	191	5.0		
60	27	23.36	6.7			8.2	260	170	5.6		
69	23	20.19	7.4								
81	20	17.15	8.5			3.0	720	471	1.1		
91	18	15.31	9.2			3.3	642	420	1.2	K	67R37-4
106	15	13.08	10			3.9	552	361	1.4	KA	67R37-4
114	14	12.14	11			4.3	494	323	1.6	KF	67R37-4
133	12	10.49	12			5.1	416	272	1.9	KAF	67R37-4
156	10	8.91	15			5.8	367	240	2.1		
175	9	7.96	16			6.4	332	217	2.3		
0.25KW											
0.19	11438	7482	1.07			3.8	553	362	1.0		
0.21	10036	6565	1.2	K	127R77-4	4.4	488	319	1.2		
0.24	8872	5804	1.4	KA	127R77-4	5.1	417	273	1.4		
0.28	7685	5027	1.6	KF	127R77-4	5.8	367	240	1.5	K	57R37-4
0.31	6761	4423	1.8	KAF	127R77-4	6.5	329	215	1.7	KA	57R37-4
0.37	5811	3801	2.1			7.2	294	192	1.9	KF	57R37-4
0.43	4948	3237	2.5			8.4	254	166	2.2	KAF	57R37-4
0.27	7743	5065	1.0			9.9	216	141	2.6		
0.32	6572	4299	1.1			11	193	126	2.9		
0.37	5743	3757	1.3			13	165	108	3.4		
0.43	4947	3236	1.5	K	107R77-4	15	145	95	3.9		
0.48	4386	2869	1.7	KA	107R77-4						
0.56	3828	2504	2.0	KF	107R77-4	4.2	536	154.02	2.7	K	77 - 8
0.66	3368	2203	2.2	KAF	107R77-4	4.8	471	135.28	3.1	KA	77 - 8
0.74	2857	1869	2.6			5.0	447	128.52	3.3	KF	77 - 8
0.82	2582	1689	2.9			5.7	395	113.56	3.7	KAF	77 - 8
0.91	2343	1533	3.2								
1.06	2013	1317	3.7			4.4	507	192.18	2.9	K	77 - 6
0.50	4215	2757	1.0			4.7	474	179.37	3.1	KA	77 - 6
0.57	3698	2419	1.1			5.5	407	154.02	3.6	KF	77 - 6
0.65	3245	2123	1.2			6.3	357	135.28	4.1	KAF	77 - 6
0.75	2837	1856	1.4	K	97R57-4						
0.86	2484	1625	1.6	KA	97R57-4	5.2	430	123.54	1.8	K	67 - 8
1.0	2186	1430	1.8	KF	97R57-4	6.0	376	108.03	2.1	KA	67 - 8
1.1	1928	1261	2.1	KAF	97R57-4	6.3	357	102.62	2.2	KF	67 - 8
1.3	1685	1102	2.4			7.2	313	90.04	2.5	KAF	67 - 8
1.5	1463	957	2.8			5.9	382	144.79	2.0	K	67 - 6
1.6	1307	855	3.1			6.9	326	123.54	2.4	KA	67 - 6
0.8	2535	1658	1.0			7.9	285	108.03	2.7	KF	67 - 6
1.0	2163	1415	1.2			8.3	271	102.62	2.8	KAF	67 - 6
1.1	1879	1229	1.4	K	87R57-4	9.6	234	144.79	3.3	K	67 - 4
1.3	1648	1078	1.5	KA	87R57-4	11	199	123.54	3.9	KA	67 - 4
1.5	1454	951	1.7	KF	87R57-4	13	174	108.03	4.4	KF	67 - 4
1.7	1280	837	2.0	KAF	87R57-4	14	166	102.62	4.7	KAF	67 - 4
1.9	1110	726	2.3			5.9	383	145.14	1.5		
2.2	975	638	2.6			6.9	327	123.85	1.7	K	57 - 6
						7.8	286	108.29	2.0	KA	57 - 6
						8.3	272	102.88	2.1	KF	57 - 6
						9.4	238	90.26	2.4	KAF	57 - 6
						11	202	76.56	2.8		



K系列选型参数表:

K select type parameter table:

输出转速	输出扭矩	传动比	使用系数	型号	极数	输出转速	输出扭矩	传动比	使用系数	型号	极数	
Na	Ma	i	fB	Type	P	Na	Ma	i	fB	Type	P	
(r/min)	(Nm)					(r/min)	(Nm)					
0. 25KW						0. 37KW						
9.6	234	145.14	2.4	K	57	0.82	3821	1689	1.97	K	107R77-4	
11	200	123.85	2.8			0.91	3468	1533	2.2	KA	107R77-4	
13	175	108.29	3.2			1.06	2980	1317	2.5	KF	107R77-4	
14	166	102.88	3.4			1.21	2602	1150	2.9	KAF	107R77-4	
15	146	90.26	3.9									
18	124	76.56	4.6			KAF	57	-4				
6.4	348	131.87	1.08	K	47	-6	0.86	3676	3625	1.10	K	97R57 -4
7.0	321	121.48	1.17	KA	47	-6	0.97	3235	2430	1.25		
8.1	276	104.37	1.36	KF	47	-6	1.1	2853	1261	1.42		
9.4	241	90.86	1.57	KAF	47	-6	1.3	2493	1102	1.62		
10	225	85.12	1.67	KAF	47	-6	1.5	2165	957	1.87		
							1.6	1934	855	2.1		
11	213	131.87	1.77	K	47	-4	1.9	1681	743	2.4	KAF	97R57 -4
12	196	121.48	1.92	KA	47	-4	2.1	1473	651	2.7		
13	169	104.37	2.2	KF	47	-4	2.4	1296	573	3.1		
15	147	90.86	2.6	KAF	47	-4	1.3	2439	1078	1.04	K	87R57 -4
16	137	85.12	2.7				1.5	2152	951	1.18		
12	192	72.54	1.0	K	37	-6	1.7	1894	837	1.34		
							1.9	1643	726	1.55		
							2.2	1443	638	1.76		
							2.5	1272	562	2.0		
							2.9	1072	474	2.4		
							3.3	964	426	2.6		
13	179	67.80	1.1	KA	37	-6	3.7	844	373	3.0	KA	87R57 -4
15	155	58.60	1.2	KF	37	-6	2.2	1407	622	1.04	KA	87R57 -4
17	131	49.79	1.4	KAF	37	-6	2.5	1249	552	1.17	KF	87R57 -4
13	172	106.38	1.1	K	37	-4	2.9	1097	485	1.33	KAF	87R57 -4
14	158	97.81	1.2				3.2	968	428	1.50		
17	135	83.69	1.4				3.9	810	358	1.80		
19	117	72.54	1.6				4.3	724	320	2.0		
21	109	67.80	1.7				4.9	640	283	2.3		
24	95	58.60	2.0				5.7	557	246	2.6		
28	80	49.79	2.3	6.4	489	216	3.0	K	77R37 -4			
31	72	44.46	2.6	7.3	432	191	3.4					
37	61	37.97	3.1	8.2	385	170	3.8					
39	57	35.57	3.3	9.3	339	150	4.3					
46	48	29.96	3.9	4.3	731	323	1.05					
48	47	28.83	4.0	5.1	615	272	1.25					
56	40	24.99	4.7	5.8	543	240	1.42	KA	67R37 -4			
60	38	23.36	4.9	KAF	37	-4	6.4	491	217	1.57	KF	67R37 -4
69	33	20.19	5.3	KAF	37	-4	7.3	432	191	1.78	KAF	67R37 -4
81	28	17.15	6.1				8.4	376	166	2.05		
91	25	15.31	6.7				9.7	326	144	2.37		
106	21	13.08	7.3				12	269	119	2.86		
114	20	12.14	7.7				5.8	543	240	1.04		
133	17	10.49	8.9				6.5	486	215	1.16		
156	14	8.91	10	7.2	434	192	1.30	K	57R37 -4			
175	13	7.96	11	8.4	376	166	1.50	KA	57R37 -4			
204	11	6.80	13	9.9	319	141	1.77	KF	57R37 -4			
218	10	6.37	13	13	244	108	2.3	KAF	57R37 -4			
0. 37KW						15	215	95	2.6			
0.28	11373	5027	1.07	K	127R77-4	3.8	868	174.99	2.9	K	87	-8
0.31	10007	4423	1.22			4.1	813	164.05	3.1	KA	87	-8
0.37	8600	3801	1.42			4.6	729	147.09	3.5	KF	87	-8
0.43	7324	3237	1.67							KAF	87	-8
0.72	4357	1926	2.80			4.5	740	197.27	3.4	K	87	-8
0.79	3975	1757	3.07			5.1	657	174.99	3.9	KA	87	-8
0.90	3486	1541	3.51	KAF	127R77-4							
0.43	7321	3236	1.03	K	107R77-4							
0.48	6491	2869	1.16	KA	107R77-4							
0.56	5665	2504	1.33	KF	107R77-4							
0.63	4984	2203	1.51	KAF	107R77-4							
0.74	4229	1869	1.78	KAF	107R77-4							



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
0.37KW						0.37KW					
5.0	671	135.28	2.2	K 77	-8	31	106	44.46	1.77		
5.2	637	128.52	2.3	KA 77	-8	37	91	37.97	2.07		
5.9	563	113.56	2.6	KF 77	-8	39	85	35.57	2.21		
6.9	481	97.05	3.0	KAF 77	-8	46	72	29.96	2.63		
						48	69	28.83	2.73		
5.7	578	154.02	2.5	K 77	-6	56	60	24.99	3.15		
6.5	508	135.28	2.9	KA 77	-6	60	56	23.36	3.28		
6.9	482	128.52	3.0	KF 77	-6	69	48	20.19	3.60	K 37	-4
7.8	426	113.56	3.4	KAF 77	-6	81	41	17.15	4.13	KA 37	-4
						91	37	15.31	4.5	KF 37	-4
						106	31	13.08	5.0	KAF 37	-4
7.23	459	192.18	3.2	K 77	-4	114	29	12.14	5.2		
7.75	429	179.37	3.4	KA 77	-4	133	25	10.49	6.0		
9.02	368	154.02	4.0	KF 77	-4	156	21	8.91	7.1		
				KAF 77	-4	175	19	7.96	7.7		
						204	16	6.80	8.7		
6.2	536	108.03	1.44	K 67	-8	218	15	6.37	9.0		
6.5	509	102.62	1.52	KA 67	-8	259	13	5.36	10		
7.4	446	90.04	1.73	KF 67	-8						
				KAF 67	-8	0.55KW					
7.2	464	123.54	1.66	K 67	-6	0.11	44111	13116	1.07	K 187R97-4	
8.2	405	108.03	1.90	KA 67	-6	0.12	39170	11647	1.20	KA 187R97-4	
8.6	385	102.62	2.0	KF 67	-6	0.19	24662	7333	1.90		
9.8	338	90.04	2.3	KAF 67	-6						
9.6	346	144.79	2.2	K 67	-4	0.16	28913	8597	1.04		
11	295	123.54	2.6	KA 67	-4	0.21	21988	6538	1.37	K 167R97-4	
13	258	108.03	3.0	KF 67	-4	0.26	18046	5366	1.67	KA 167R97-4	
15	215	90.04	3.6	KAF 67	-4	0.34	13651	4059	2.2		
18	182	76.37	4.2								
7.1	465	123.54	1.2	K 57	-6					K 157R97-4	
8.2	406	108.03	1.4	KA 57	-6	0.35	13365	3974	1.27	KA 157R97-4	
8.6	386	102.62	1.5	KF 57	-6	0.46	10247	3047	1.65	KF 157R97-4	
10	339	90.26	1.7	KAF 57	-6					KAF157R97-4	
12	287	76.56	2.0								
13	259	69.12	2.2			0.43	10886	3237	1.12		
9.6	347	145.14	1.6			0.47	9891	2941	1.24		
11	296	123.85	1.9	K 57	-4	0.55	8569	2548	1.43	K 127R77-4	
13	259	108.29	2.2	KA 57	-4	0.72	6477	1926	1.89	KA 127R77-4	
14	246	102.88	2.3	KF 57	-4	0.79	5909	1757	2.1	KF 127R77-4	
15	216	90.26	2.6	KAF 57	-4	0.90	5183	1541	2.4	KAF127R77-4	
18	183	76.56	3.1			1.0	4513	1342	2.7		
20	165	69.12	3.4			1.2	3958	1177	3.1		
						1.4	3447	1025	3.5		
9.7	341	90.86	1.10	K 47	-6	0.63	7409	2203	1.01		
10	319	85.12	1.18	KA 47	-6	0.74	6286	1869	1.20		
12	282	75.2	1.33	KF 47	-6	0.82	5680	1689	1.32		
				KAF 47	-6	0.91	5156	1533	1.46	K 107R77-4	
11	315	131.67	1.19			1.1	4429	1317	1.70	KA 107R77-4	
11	290	121.48	1.30			1.2	3868	1150	1.94	KF 107R77-4	
13	247	104.37	1.51	K 47	-4	1.4	3414	1015	2.2	KAF107R77-4	
15	217	90.86	1.73	KA 47	-4	1.6	2929	871	2.6		
16	203	85.12	1.85	KF 47	-4	1.8	2630	782	2.9		
18	180	75.20	2.1	KAF 47	-4	2.0	2307	686	3.3		
20	167	69.84	2.3			2.3	2038	606	3.7		
22	151	63.30	2.5								
19	173	72.54	1.08	K 37	-4	1.1	4241	1261	1.0	K 97R57 -4	
21	162	67.80	1.16	KA 37	-4	1.3	3706	1102	1.1	KA 97R57 -4	
24	140	58.60	1.34	KF 37	-4	1.5	3218	957	1.3	KF 97R57 -4	
28	119	49.79	1.58	KAF 37	-4	1.6	2875	855	1.4	KAF97R57 -4	



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
0.55KW						0.55KW					
1.9	2499	743	1.6	K 97R57 -4 KA 97R57 -4 KF 97R57 -4 KAF97R57 -4		9.0	547	154.02	2.7	K 77	-4
2.1	2189	651	1.8			10	481	135.28	3.0	KA 77	-4
2.4	1927	573	2.1			11	457	128.52	3.2	KF 77	-4
2.8	1695	504	2.4			12	403	113.56	3.6	KAF 77	-4
3.2	1470	437	2.8			14	345	97.05	4.2		
3.6	1285	382	3.2								
4.6	1026	305	3.9	K 87R57 -4 KA 87R57 -4 KF 87R57 -4 KAF87R57 -4		7.2	689	123.54	1.12	K 67	-6
1.9	2442	726	1.04			8.2	603	108.03	1.28	KA 67	-6
2.2	2146	638	1.18			8.6	573	102.62	1.35	KF 67	-6
2.5	1890	562	1.34			10	502	90.04	1.53	KAF 67	-6
2.9	1594	474	1.59			12	426	76.37	1.81		
3.3	1433	426	1.77								
3.7	1254	373	2.0			11	439	123.54	1.76	K 67	-4
4.2	1110	330	2.3			13	384	108.03	2.0	KA 67	-4
4.7	985	293	2.6			15	320	90.04	2.4	KF 67	-4
5.6	841	250	3.0			18	271	76.37	2.8	KAF 67	-4
5.9	794	236	3.2	K 77R37 -4 KA 77R37 -4 KF 77R37 -4 KAF77R37 -4		9.8	504	90.04	1.12	K 57	-6
6.9	676	201	3.8			12	427	76.37	1.32	KA 57	-6
3.2	1439	428	1.01			13	386	69.12	1.46	KF 57	-6
3.9	1204	358	1.21			15	339	60.81	1.66	KAF 57	-6
4.3	1076	320	1.35			17	320	57.42	1.76		
4.9	952	283	1.53								
5.7	827	246	1.76			11	440	123.85	1.28	K 57 -4 KA 57 -4 KF 57 -4 KAF 57 -4	
6.4	726	216	2.0			13	385	108.29	1.47		
7.3	642	191	2.3			14	365	102.88	1.54		
8.2	572	170	2.5			15	321	90.26	1.76		
9.3	504	150	2.9			18	272	76.56	2.1		
6.4	730	217	1.1			20	246	69.12	2.3		
7.3	642	191	1.2			23	216	60.81	2.6		
8.4	558	166	1.4			24	204	57.42	2.8		
9.7	484	144	1.6	K 57R37 -4 KA 57R37 -4 KF 57R37 -4 KAF57R37 -4		13	371	104.37	1.01	K 47 -4 KA 47 -4 KF 47 -4 KAF 47 -4	
12	400	119	1.9			15	323	90.86	1.17		
8.4	558	166	1.0			16	302	85.12	1.24		
9.9	474	141	1.2			18	267	75.20	1.41		
11	424	126	1.3			20	248	69.84	1.52		
13	363	108	1.6	K 87 -8 KA 87 -8 KF 87 -8 KAF 87 -8		22	225	63.30	1.67	K 37 -4 KA 37 -4 KF 37 -4 KAF 37 -4	
15	319	95	1.8			24	202	56.83	1.86		
3.8	1290	174.99	2.0			28	174	48.93	2.2		
4.1	1209	164.05	2.1			30	164	46.03	2.3		
4.5	1084	147.09	2.3	K 87 -6 KA 87 -6 KF 87 -6 KAF 87 -6		28	177	49.79	1.06	K 37 -4 KA 37 -4 KF 37 -4 KAF 37 -4	
4.5	1101	197.7	2.3			31	158	44.46	1.19		
5.1	976	174.99	2.6			37	135	37.97	1.39		
5.4	915	164.05	2.8			39	126	35.57	1.49		
6.0	821	147.09	3.1			46	106	29.96	1.77		
						48	102	28.83	1.84		
6.5	755	135.28	1.9	K 77 -8 KA 77 -8 KF 77 -8 KAF 77 -8		56	89	24.99	2.1	K 37 -4 KA 37 -4 KF 37 -4 KAF 37 -4	
6.9	717	128.52	2.0			60	83	23.36	2.2		
7.8	634	113.56	2.3			69	72	20.19	2.4		
9.1	541	97.05	2.7			81	61	17.15	2.8		
						94	54	15.31	3.0		
5.7	859	154.02	1.70	K 77 -6 KA 77 -6 KF 77 -6 KAF 77 -6		106	46	13.08	3.3	K 37 -4 KA 37 -4 KF 37 -4 KAF 37 -4	
6.5	755	135.28	1.93			114	43	12.14	3.5		
6.9	717	128.52	2.0			133	37	10.49	4.0		
7.8	634	113.56	2.3			156	32	8.91	4.8		
						175	28	7.96	5.2		
						204	24	6.80	5.8		
						218	23	6.37	6.0		
						259	19	5.36	6.9		



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
0.75KW						0.75KW					
0.19	33630	7333	1.40	K 187R97-4		4.6	1456	147.09	1.7	K 87	- 8
0.21	30901	6738	1.52	KA 187R97-4		5.4	1254	126.68	2.0	KA 87	- 8
0.23	27443	5984	1.71			5.9	1140	115.16	2.2	KF 87	- 8
						6.6	1017	102.71	2.5	KAF 87	- 8
0.21	29984	6538	1.00	K 167R97-4		5.2	1295	174.99	2.0	K 87	- 6
0.26	24609	5366	1.22	KA 167R97-4		5.5	1214	164.05	2.1	KA 87	- 6
0.34	18615	4059	1.62			6.2	1088	147.09	2.3	KF 87	- 6
0.41	15405	3359	1.95			7.2	937	126.68	2.7	KAF 87	- 6
0.46	13974	3047	1.21	K 157R97-4		7.0	956	197.27	2.7	K 87	- 4
0.83	7705	1680	2.2	KA 157R97-4		8.0	848	174.99	3.0	KA 87	- 4
1.02	6260	1365	2.7	KF 157R97-4		8.5	795	164.05	3.2	KF 87	- 4
				KAF157R97-4		9.4	721	147.09	3.6	KAF 87	- 4
0.55	11685	2548	1.05			6.7	1001	135.28	1.46	K 77	- 6
0.72	8833	1926	1.38	K 127R77-4		7.1	951	128.52	1.53	KA 77	- 6
0.79	8058	1757	1.52	KA 127R77-4		8.0	840	113.56	1.73	KF 77	- 6
0.90	7067	1541	1.73	KF 127R77-4		9.4	718	97.05	2.0	KAF 77	- 6
1.0	6154	1342	1.99	KAF127R77-4		10	658	88.97	2.2		
1.2	5398	1177	2.3			9.0	746	154.02	1.95	K 77	- 4
1.4	4701	1025	2.6			10	655	135.28	2.2	KA 77	- 4
1.5	4123	899	3.0			11	623	128.52	2.3	KF 77	- 4
0.91	7030	1533	1.07	K 107R77-4		12	550	113.56	2.6		
1.1	6040	1317	1.25	KA 107R77-4		14	470	97.05	3.1	KAF 77	- 4
1.2	5274	1150	1.43	KF 107R77-4		11	598	123.54	1.29		
1.4	4655	1015	1.62	KAF107R77-4		13	523	108.03	1.47	K 67	- 4
1.6	3994	871	1.88			15	436	90.04	1.77	KA 67	- 4
1.8	3586	782	2.1			18	370	76.37	2.1	KF 67	- 4
2.0	3146	686	2.4			20	334	68.95	2.3		
2.3	2779	606	2.7			23	294	60.66	2.6	KAF 67	- 4
						24	277	57.28	2.8		
1.6	3921	855	1.0			13	525	108.29	1.1		
1.9	3407	743	1.2	K 97R57-4		14	498	102.88	1.2	K 57	- 4
2.1	2986	651	1.4	KA 97R57-4		15	437	90.26	1.3	KA 57	- 4
2.4	2628	573	1.5	KF 97R57-4		18	371	76.56	1.5	KF 57	- 4
2.8	2311	504	1.7	KAF 97R57-4		20	335	69.12	1.7		
3.2	2004	437	2.0			23	295	60.81	1.9	KAF 57	- 4
3.6	1752	382	2.3			24	278	57.42	2.0		
4.6	1399	305	2.9			28	237	48.89	2.4		
5.4	1183	258	3.4			31	215	44.43	2.6		
6.0	1064	232	3.8			18	364	75.2	1.03		
7.0	913	199	4.4			20	338	69.84	1.11		
						22	307	63.30	1.23	K 47	- 4
2.9	2174	474	1.17	K 87R57-4		24	275	56.83	1.37	KA 47	- 4
3.3	1954	426	1.30	KA 87R57-4		28	237	48.95	1.59	KF 47	- 4
3.7	1711	373	1.48	KF 87R57-4		30	223	46.03	1.69	KAF 47	- 4
4.2	1513	330	1.68	KAF 87R57-4		35	192	39.61	1.96		
4.7	1344	293	1.89			39	171	35.39	2.2		
5.6	1147	250	2.2			45	151	31.19	2.5		
5.9	1082	236	2.3			37	184	37.97	1.02		
6.9	922	201	2.8			39	172	35.57	1.09		
						46	145	29.96	1.30	K 37	- 4
4.9	1298	283	1.12	K 77R37-4		48	140	28.83	1.35	KA 37	- 4
5.7	1128	246	1.29	KA 77R37-4		56	121	24.99	1.55	KF 37	- 4
6.4	991	216	1.47	KF 77R37-4		60	113	23.36	1.62		
				KAF 77R37-4		69	98	20.19	1.78	KAF 37	- 4
						81	83	17.15	2.0		
						91	74	15.31	2.2		
3.9	1737	175.47	2.3	K 97	- 8						
4.4	1508	152.31	2.7	KA 97	- 8						
4.8	1389	140.28	2.9	KF 97	- 8						
				KAF 97	- 8						



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
0.75KW						1.1KW					
106	63	13.08	2.4			3.7	2509	373	1.01		
114	59	12.14	2.6			4.2	2220	330	1.14	K	87R57-4
133	51	10.49	3.0	K	37 - 4	4.7	1971	293	1.29	KA	87R57-4
156	43	8.91	3.5	KA	37 - 4	5.6	1682	250	1.51	KF	87R57-4
175	39	7.96	3.8	KF	37 - 4	5.9	1587	236	1.60	KAF	87R57-4
204	33	6.80	4.3	KAF	37 - 4	6.9	1352	201	1.88		
218	31	6.37	4.4								
259	26	5.36	5.1			3.9	2548	175.47	1.6	K	97 - 8
						4.4	2212	152.31	1.8	KA	97 - 8
						4.8	2037	140.28	2.0	KF	97 - 8
						5.5	1810	124.61	2.2	KAF	97 - 8
1.1KW											
0.21	44998	6738	1.04			5.2	1904	175.47	2.1	K	97 - 6
0.23	39962	5984	1.18	K	187R97-4	5.9	1653	152.31	2.4	KA	97 - 6
0.26	35728	5350	1.32	KA	187R97-4	6.5	1522	140.28	2.7	KF	97 - 6
0.29	32122	4810	1.46			7.3	1352	124.61	3.0	KAF	97 - 6
0.32	29144	4364	1.61								
0.34	27107	4059	1.11			8.0	1238	175.47	3.3	K	97 - 4
0.42	22432	3359	1.34			9.1	1074	152.31	3.7	KA	97 - 4
0.51	18305	2741	1.64	K	167R97-4	10	989	140.28	4.1	KF	97 - 4
0.64	14518	2174	2.1	KA	167R97-4						
0.82	11340	1698	2.7			5.2	1899	174.99	1.34	K	87 - 6
1.00	9363	1402	3.2			5.5	1780	164.05	1.42	KA	87 - 6
1.08	8622	1291	3.5			6.2	1596	147.09	1.59	KF	87 - 6
0.60	15507	2322	1.09			7.2	1375	126.68	1.84	KAF	87 - 6
0.83	11219	1680	1.51	K	157R97-4	8.0	1234	174.99	2.1	K	87 - 4
1.0	9116	1365	1.86	KA	157R97-4	8.5	1157	164.05	2.2	KA	87 - 4
1.1	8207	1229	2.1	KF	157R97-4	9.5	1037	147.09	2.4	KF	87 - 4
1.3	7299	1093	2.3	KAF	157R97-4	11	894	126.68	2.8	KF	87 - 4
1.5	6291	942	2.7			12	812	115.16	3.1	KAF	87 - 4
1.6	5703	854	3.0								
0.79	11818	1757	1.0			7.1	1395	128.52	1.04	K	77 - 6
0.90	10365	1541	1.2			8.0	1232	113.56	1.18	KA	77 - 6
1.0	9027	1342	1.4			9.4	1053	97.05	1.38	KF	77 - 6
1.2	7917	1177	1.5	K	127R77-4						
1.4	6894	1025	1.8	KA	127R77-4	10	954	135.28	1.53		
1.5	6047	899	2.0	KF	127R77-4	11	906	128.52	1.61	K	77 - 4
1.8	5314	790	2.3	KAF	127R77-4	12	801	113.56	1.82	KA	77 - 4
2.0	4641	690	2.6			14	685	97.05	2.1	KF	77 - 4
2.3	4029	599	3.0			16	628	88.97	2.3	KAF	77 - 4
2.6	3625	539	3.4			18	551	78.07	2.6		
3.0	3148	468	3.9			19	522	73.99	2.8		
1.2	7735	1150	1.0			13	762	108.03	1.01		
1.4	6827	1015	1.1			14	724	102.62	1.06		
1.6	5859	981	1.3			16	635	90.04	1.21		
1.8	5260	782	1.4	K	107R77-4	18	539	76.37	1.43	K	67 - 4
2.0	4614	686	1.6	KA	107R77-4	20	486	68.95	1.58	KA	67 - 4
2.3	4076	606	1.8	KF	107R77-4	23	428	60.66	1.80	KF	67 - 4
2.7	3464	515	2.2	KAF	107R77-4	24	404	57.28	1.91	KAF	67 - 4
3.1	3060	455	2.5			29	344	48.77	2.2		
3.5	2704	402	2.8			32	313	44.32	2.5		
4.0	2351	351	3.2			36	271	38.39	2.8		
4.5	2065	307	3.6								
2.4	3854	573	1.05	K	97R57-4	18	540	76.56	1.04	K	57 - 4
2.8	3390	504	1.19	KA	97R57-4	20	488	69.12	1.16	KA	57 - 4
3.2	2939	437	1.38	KF	97R57-4	23	429	60.81	1.31	KF	57 - 4
3.6	2569	382	1.57	KAF	97R57-4	24	405	57.42	1.39		
4.1	2300	342	1.76			29	345	48.89	1.64	KAF	57 - 4



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
1. 1KW						1. 5KW					
32	313	44.43	1.80			2.6	4881	536	2.5	K 127R77-4	
36	271	38.49	2.1			3.3	3807	418	3.2	KA 127R77-4	
39	252	35.70	2.2			3.8	3342	367	3.7	KF 127R77-4	
46	214	30.28	2.6							KAF127R77-4	
51	193	27.34	2.9			1.8	7121	782	1.1		
58	170	24.05	3.3			2.0	6247	686	1.2		
62	160	22.71	3.5	K 57	- 4	2.3	5519	606	1.4	K 107R77-4	
72	136	19.34	4.0	KA 57	- 4	2.7	4690	515	1.6	KA 107R77-4	
80	124	17.57	4.2	KF 57	- 4	3.1	4144	455	1.8	KF 107R77-4	
92	107	15.22	4.7	KAF 57	- 4	3.5	3661	402	2.1	KAF107R77-4	
106	93	13.25	5.1			4.0	3196	351	2.4		
117	84	11.92	4.6			4.6	2796	307	2.7		
124	79	11.26	4.9			3.2	3980	437	1.0		
146	68	9.59	5.6			3.7	3479	382	1.2	K 97R57-4	
161	61	8.71	6.0			4.1	3114	342	1.3	KA 97R57-4	
185	63	7.55	6.4			4.6	2778	305	1.5	KF 97R57-4	
213	46	6.57	7.0			5.4	2350	258	1.7	KAF 97R57-4	
29	345	48.95	1.09			6.0	2113	232	1.9		
30	325	46.03	1.16			7.0	1812	199	2.2		
35	279	39.61	1.35	K 47	- 4	5.6	2277	250	1.11	K 87R57-4	
40	250	35.39	1.51	KA 47	- 4	5.9	2149	236	1.18	KA 87R57-4	
45	220	31.19	1.71	KF 47	- 4	7.0	1930	201	1.39	KF 87R57-4	
48	207	29.32	1.82	KAF 47	- 4	7.7	1667	183	1.52	KAF 87R57-4	
54	183	25.91	2.1								
64	154	21.81	2.4			4.9	2770	141.93	2.7	K 107 -8	
72	138	19.58	2.7			5.8	2334	119.58	3.2	KA 107 -8	
56	176	24.99	1.07			6.2	2163	110.83	3.5	KF 107 -8	
60	165	23.36	1.11							KAF 107 -8	
69	142	20.19	1.22			4.5	2972	152.31	1.36	K 97 -8	
82	121	17.15	1.40			4.9	2738	140.28	1.48	KA 97 -8	
91	108	15.31	1.52	K 37	- 4	5.5	2432	124.61	1.66	KF 97 -8	
107	92	13.08	1.68	KA 37	- 4					KAF 97 -8	
115	86	12.14	1.76	KF 37	- 4	5.2	2569	175.47	1.57	K 97 -6	
133	74	10.49	2.0	KAF 37	- 4	6.0	2229	152.31	1.81	KA 97 -6	
157	63	8.91	2.4			6.6	2053	140.28	1.91	KF 97 -6	
176	56	7.96	2.6			7.4	1824	124.61	2.2	KAF 97 -6	
206	48	6.80	2.9			8.0	1688	175.47	2.4	K 97 -4	
220	45	6.37	3.0			9.2	1465	152.31	2.7	KA 97 -4	
261	38	5.36	3.5			10	1349	140.28	3.0	KF 97 -4	
0.29	43803	4810	1.07			11	1199	124.61	3.4	KAF 97 -4	
0.32	39741	4364	1.18			6.3	2153	147.09	1.18	K 87 -6	
0.39	32866	3609	1.43	K 187R97-4		7.2	1854	126.68	1.37	KA 87 -6	
0.46	27884	3062	1.69	KA 187R97-4		7.9	1686	115.16	1.50	KF 87 -6	
0.56	22940	2519	2.0			9.0	1503	102.71	1.69	KAF 87 -6	
0.62	20654	2268	2.3			8.0	1683	174.99	1.51		
0.51	24961	2741	1.21			8.5	1578	164.05	1.61	K 87 -4	
0.64	19798	2174	1.52			9.5	1415	147.09	1.79	KA 87 -4	
0.82	15463	1698	1.95	K 167R97-4		11	1218	126.68	2.1	KF 87 -4	
1.0	12767	1402	2.4	KA 167R97-4		12	1108	115.16	2.3	KAF 87 -4	
1.1	11757	1291	2.6			14	988	102.71	2.6		
0.83	15299	1680	1.1			16	830	86.34	3.1		
1.0	12431	1365	1.4								
1.1	11192	1229	1.5	K 157R97-4							
1.3	9954	1093	1.7	KA 157R97-4							
1.5	8578	942	2.0	KF 157R97-4							
1.6	7777	854	2.2	KAF157R97-4							
2.5	5145	565	3.3								
2.8	4581	503	3.7								



K系列选型参数表：

K select type parameter table:

输出转速	输出扭矩	传动比	使用系数	型号	极数	输出转速	输出扭矩	传动比	使用系数	型号	极数
Na (r/min)	Ma (Nm)	i	fB	Type	P	Na (r/min)	Ma (Nm)	i	fB	Type	P
1. 5KW						2. 2KW					
9.4	1436	97.05	1.01	K 77	- 6	0.46			1.17	K 187R97-4 KA 187R97-4	
10	1317	88.97	1.11	KA 77	- 6	0.50	40321	3062	1.27		
12	1155	78.07	1.26	KF 77	- 6	0.56	37108	2818	1.42		
				KAF 77	- 6	0.63	33171	2519	1.57		
						0.69	29866	2268	1.74		
						0.78	27048	2054	1.96		
						0.88	23979	1821	2.2		
10	1301	135.28	1.12	K 77	- 4	0.63	21135	1605	2.2	K 167R97-4 KA 167R97-4	
11	1236	128.52	1.18			0.65	29655	2252	1.01		
12	1092	113.56	1.33			0.65	28628	2174	1.05		
14	933	97.05	1.56			0.84	22360	1698	1.35		
16	856	88.97	1.70			1.0	18462	1402	1.63		
18	751	78.07	1.94			1.1	17000	1291	1.77		
19	712	73.99	2.0			1.3	14498	1101	2.1		
22	623	64.75	2.3			1.5	12431	944	2.4		
24	561	58.34	2.6								
27	492	51.18	3.0								
31	434	45.16	3.4								
35	385	40.04	3.8								
18	735	76.37	1.05	K 67	- 4	1.2	16184	1229	1.05	K 157R97-4	
20	663	68.95	1.16			1.3	14393	1093	1.18	KA 157R97-4	
23	583	60.66	1.32			1.5	12404	942	1.36	KF 157R97-4	
24	551	57.28	1.40			1.7	11246	854	1.50	KAF 157R97-4	
29	469	48.77	1.64			1.9	9955	756	1.70		
32	426	44.32	1.81			2.6	7058	536	1.73	K 127R77-4	
36	369	38.39	2.1			3.0	6229	473	1.96	KA 127R77-4	
39	343	35.62	2.2			3.4	5504	418	2.2	KF 127R77-4	
46	291	30.22	2.7			3.9	4833	367	2.5	KAF 127R77-4	
51	262	27.28	2.9			4.3	4346	330	2.8		
58	231	24.00	3.3								
24	552	57.42	1.02	K 57	- 4	2.8	6782	515	1.11	K 107R77-4 KA 107R77-4 KF 107R77-4 KAF 107R77-4	
29	470	48.89	1.20			3.1	5992	455	1.26		
32	427	44.43	1.32			3.5	5294	402	1.42		
36	370	38.49	1.52			4.0	4622	351	1.63		
39	343	35.70	1.64			4.6	4043	307	1.86		
46	291	30.28	1.94			5.1	3648	277	2.1		
51	263	27.34	2.1			5.8	3200	243	2.4		
58	231	24.05	2.4								
62	218	22.71	2.6								
72	186	19.34	2.9								
40	340	35.39	1.10	K 47	- 4	4.7	4016	305	1.01	K 97R57-4	
45	300	31.19	1.25			5.5	3397	258	1.19	KA 97R57-4	
48	282	29.32	1.33			6.1	3055	232	1.32	KF 97R57-4	
54	249	25.91	1.51			7.1	2620	199	1.54	KAF 97R57-4	
64	210	21.81	1.79			5.0	3948	141.93	1.90	K 107 - 8	
72	188	19.58	2.0			5.9	3326	119.58	2.3	KA 107 - 8	
83	162	16.86	2.2			6.4	3083	110.83	2.4	KF 107 - 8	
88	153	15.86	2.3			7.1	2763	99.34	2.7	KAF 107 - 8	
103	131	13.65	2.6								
115	117	12.19	2.8								
119	113	11.77	2.3								
82	165	17.15	1.03	K 37	- 4	6.1	3200	152.31	1.26	K 97 - 6	
91	147	15.31	1.12			6.7	2947	140.28	1.37	KA 97 - 6	
107	126	13.08	1.23			7.5	2618	124.61	1.54	KF 97 - 6	
115	117	12.14	1.29			14	1443	103.78	2.80	KAF 97 - 6	
133	101	10.49	1.49			8.1	2440	175.47	1.66	K 97 - 4	
157	86	8.91	1.75			9.3	2118	152.31	1.91	KA 97 - 4	
176	77	7.96	1.90			10	1951	140.28	2.1	KF 97 - 4	
206	65	6.80	2.2			11	1733	124.61	2.3	KAF 97 - 4	
220	61	6.37	2.2			14	1443	103.78	2.8	KAF 97 - 4	
261	52	5.36	2.6			15	1346	96.80	3.0		



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
2. 2KW						3. 0KW					
15	1350	97.05	1.08			0.56	45233	2519	1.04		
16	1237	88.97	1.18			0.63	40726	2268	1.15		
18	1086	78.07	1.34			0.69	36883	2054	1.27	K	187R97-4
19	1029	73.99	1.42			0.78	32699	1821	1.44	KA	187R97-4
22	901	64.75	1.62	K	77	0.88	28820	1605	1.63		
24	811	58.34	1.80	KA	77	1.0	25050	1395	1.88		
28	712	51.18	2.0	KF	77	1.2	21476	1196	2.2		
31	628	45.16	2.3								
35	557	40.04	2.6	KAF	77	1.0	25175	1402	1.2		
40	490	35.20	3.0			1.1	23182	1291	1.3		
46	430	30.89	3.4			1.3	19770	1101	1.52	K	167R97-4
49	407	29.27	3.6			1.5	16951	944	1.77	KA	167R97-4
55	356	25.62	4.1			1.7	15137	843	1.99		
						1.9	13593	757	2.2		
29	678	48.77	1.14			1.5	16915	942	1.00	K	157R97-4
32	616	44.32	1.25			1.7	15335	854	1.10	KA	157R97-4
37	534	38.39	1.44			1.9	13575	756	1.25	KF	157R97-4
40	495	35.62	1.56			2.5	10146	565	1.67	KAF	157R97-4
47	420	30.22	1.83			2.8	9032	503	1.87		
52	379	27.28	2.0								
59	334	24.00	2.3	K	67	2.6	9625	536	1.27	K	127R87-4
63	315	22.66	2.3	KA	67	3.0	8494	473	1.44	KA	127R87-4
74	268	19.30	2.7	KF	67	3.4	7506	418	1.63	KF	127R87-4
81	244	17.54	2.9			3.9	6590	367	1.85	KF	127R87-4
93	211	15.19	3.1	KAF	67	4.3	5926	330	2.1	KAF	127R87-4
107	184	13.22	3.4			4.9	5207	290	2.3		
116	170	12.24	2.9								
136	145	10.42	3.2			2.4	10756	599	1.14	K	127R77-4
150	132	9.47	3.4			2.6	9679	539	1.26	KA	127R77-4
173	114	8.20	3.6			3.0	8404	468	1.45	KF	127R77-4
199	99	7.14	4.0			3.5	7362	410	1.66	KAF	127R77-4
37	535	38.49	1.05			3.5	7219	402	1.04		
40	497	35.70	1.14			4.0	6303	351	1.19		
47	421	30.28	1.34			4.6	5513	307	1.36	K	107R77-4
52	380	27.34	1.48			5.1	4974	277	1.51	KA	107R77-4
59	334	24.05	1.69	K	57	5.8	4363	243	1.72	KF	107R77-4
63	316	22.71	1.79	KA	57	6.6	3861	215	1.95	KF	107R77-4
73	269	19.34	2.0	KF	57	7.5	3394	189	2.2	KAF	107R77-4
81	244	17.57	2.1			8.5	3017	168	2.5		
93	212	15.22	2.4	KAF	57	9.5	2676	149	2.8		
107	184	13.25	2.6			10	2496	139	3.0		
119	166	11.92	2.4								
126	157	11.26	2.5								
55	360	25.91	1.04			5.5	4893	258	0.83	K	97R57-4
65	303	21.81	1.24			7.1	3774	199	1.07	KA	97R57-4
73	272	19.58	1.38			6.1	4400	232	0.92	KF	97R57-4
84	234	16.86	1.52	K	47					KAF	97R57-4
90	221	15.86	1.62	KA	47	5.0	5366	141.46	1.40	K	107 -8
104	190	13.65	1.78	KF	47	5.9	4543	119.76	1.66	KA	107 -8
116	170	12.19	1.94			6.4	4204	110.83	1.79	KF	107 -8
121	164	11.77	1.61	KAF	47	7.1	3768	99.34	2.0	KAF	107 -8
134	147	10.56	1.79			7.9	3402	89.68	2.2		
156	127	9.10	2.1								
135	146	10.49	1.03	K	37	6.8	3668	141.46	1.9	K	107 -6
159	124	8.91	1.21	KA	37	8.0	3360	119.76	2.2	KA	107 -6
178	111	7.96	1.32			8.7	3109	110.83	2.4	KF	107 -6
209	95	6.80	1.49	KF	37	9.7	2787	99.34	2.7	KAF	107 -6
223	89	6.37	1.54								
265	75	5.36	1.77	KAF	37						
						10	2692	141.93	2.8	K	107 -4
						12	2268	119.58	3.3	KA	107 -4
										KF	107 -4
										KAF	107 -4



K系列选型参数表：

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
3. 0KW						3. 0KW					
7.7	3496	124.61	1.16	K 97	- 6	73	371	19.58	1.01		
9.3	2911	103.78	1.39	KA 97	- 6	84	320	16.86	1.12		
9.9	2716	96.80	1.49	KF 97	- 6	90	301	15.86	1.19		
11	2427	86.52	1.67	KAF 97	- 6	104	259	13.65	1.31		
8.1	3328	175.47	1.21			116	231	12.19	1.42	K 47	- 4
9.3	2889	152.31	1.40			121	223	11.77	1.18	KA 47	- 4
10	2660	140.28	1.52			134	200	10.56	1.31	KF 47	- 4
11	2363	124.61	1.71	K 97	- 4	156	173	9.1	1.53	KAF 47	- 4
14	1968	103.78	2.05	KA 97	- 4	166	162	8.56	1.56		
15	1836	96.80	2.20	KF 97	- 4	193	140	7.36	1.68		
16	1646	86.52	2.46			216	125	6.58	1.81		
18	1477	77.89	2.74	KAF 97	- 4	244	110	5.81	1.96		
20	1338	70.54	3.02							K 37	- 4
23	1186	62.55	3.41			209	129	6.8	1.09	KA 37	- 4
25	1072	56.55	3.77			223	121	6.37	1.13	KF 37	- 4
11	2403	126.68	1.06			265	102	5.36	1.29	KAF 37	- 4
12	2184	115.16	1.16			4. 0KW					
14	1948	102.71	1.30			1.7	19697	825	2.4	K 187R107-4	
16	1637	86.34	1.55	K 87	- 4	2.8	12272	514	3.8	KA 187R107-4	
18	1505	79.34	1.69	KA 87	- 4						
20	1336	70.46	1.90	KF 87	- 4	0.79	42993	1821	1.09		
23	1195	63.00	2.1	KAF 87	- 4	0.90	37894	1605	1.24	K 187R97-4	
25	1074	56.64	2.4			1.0	32936	1395	1.43	KA 187R97-4	
29	932	49.16	2.7			1.2	28237	1196	1.66		
32	835	44.02	2.9			1.4	24696	1046	1.90		
39	693	36.52	3.4			1.5	22240	942	2.1		
19	1403	73.99	1.04			1.3	25994	1101	1.16		
22	1228	64.75	1.19	K 77	- 4	1.5	22288	944	1.35	K 167R97-4	
24	1106	58.34	1.32	KA 77	- 4	1.7	19903	843	1.51	KA 167R97-4	
28	971	51.18	1.50	KF 77	- 4	1.9	17873	757	1.68		
31	856	45.16	1.70	KAF 77	- 4	2.3	14874	630	2.0		
35	759	40.04	1.92							K 157R97-4	
40	668	35.20	2.2			2.5	1333.9	565	1.27	KA 157R97-4	
46	586	30.89	2.5			2.9	11876	503	1.42	KF 157R97-4	
37	728	38.39	1.06			3.3	10223	433	1.66	KAF 157R97-4	
40	676	35.62	1.14								
47	573	30.22	1.34			3.0	11167	473	1.09	K 127R87-4	
52	517	27.28	1.49			3.4	9869	418	1.24	KA 127R87-4	
59	455	24.00	1.65	K 67	- 4	3.9	8665	367	1.41	KF 127R87-4	
63	430	22.66	1.71	KA 67	- 4	4.3	7901	330	1.55	KAF 127R87-4	
74	366	19.30	1.95	KF 67	- 4	4.9	6943	290	1.76		
81	333	17.54	2.1	KAF 67	- 4	5.6	6057	253	2.0		
93	288	15.19	2.3							K 127R77-4	
107	251	13.22	2.5			3.0	11205	468	1.09	KA 127R77-4	
116	232	12.24	2.1			3.5	9816	410	1.24	KF 127R77-4	
136	198	10.42	2.4							KAF 127R77-4	
150	180	9.47	2.5								
52	519	27.34	1.09			4.6	7350	307	1.02		
59	456	24.05	1.24			5.1	6632	277	1.13	K 107R77-4	
63	431	22.71	1.31			5.8	5818	243	1.29	KA 107R77-4	
73	367	19.34	1.47			6.6	5148	215	1.46	KF 107R77-4	
81	333	17.57	1.57	K 57	- 4	7.5	4525	189	1.66	KAF 107R77-4	
93	289	15.22	1.74	KA 57	- 4	8.5	4022	168	1.68		
107	251	13.25	1.9	KF 57	- 4	9.5	3567	149	1.9		
119	226	11.92	1.7	KAF 57	- 4	11	3232	135	2.1		
126	214	11.26	1.8							K 107	- 8
148	182	9.59	2.1			5.3	6825	134.94	1.8	KA 107	- 8
163	165	8.71	2.2			5.8	6202	122.60	2.0	KF 107	- 8
188	143	7.55	2.4			6.4	5570	110.13	2.2	KAF 107	- 8
216	125	6.57	2.6								



K系列选型参数表:

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
4. 0KW						4. 0KW					
6.6	5464	146.07	2.2	K 127	- 6	63	566	22.71	1.00		
7.1	5047	134.94	2.4	KA 127	- 6	74	482	19.34	1.12		
7.8	4587	122.60	2.7	KF 127	- 6	82	438	17.57	1.19		
8.7	4119	110.13	3.0	KAF 127	- 6	95	380	15.22	1.33		
6.4	5605	110.83	1.34	K 107	- 8	109	330	13.25	1.45	K 57	- 4
7.1	5024	99.34	1.50	KA 107	- 8	121	297	11.92	1.31	KA 57	- 4
7.9	4536	89.68	1.66	KF 107	- 8	128	281	11.26	1.39	KF 57	- 4
8.7	4120	81.46	1.83	KAF 107	- 8	150	239	9.59	1.59	KAF 57	- 4
6.8	5309	141.93	1.42	K 107	- 6	165	217	8.71	1.69		
8.0	4473	119.58	1.68	KA 107	- 6	191	188	7.55	1.82		
8.7	4146	110.83	1.81	KF 107	- 6	219	164	6.57	1.98		
9.7	3716	99.34	2.0	KF 107	- 6	5. 5KW					
11	3354	89.68	2.2	KAF 107	- 6	1.0	45286	1395	1.04		
10	3527	141.46	2.1			1.2	38826	1196	1.21		
12	2986	119.76	2.5	K 107	- 4	1.4	33957	1046	1.38	K 187R97-4	
13	2764	110.83	2.7	KA 107	- 4	1.5	30580	942	1.54	KA 187R97-4	
14	2477	99.34	3.0	KF 107	- 4	2.0	23926	737	2.0		
16	2236	89.68	3.4	KF 107	- 4	2.3	20095	619	2.3		
18	2031	81.46	3.7	KAF 107	- 4	1.7	27367	843	1.10		
20	1802	72.27	4.2			1.9	24575	757	1.22		
10	3498	140.28	1.16			2.3	20452	630	1.47	K 167R97-4	
12	3107	124.61	1.30	K 97	- 4	2.6	18212	561	1.65	KA 167R97-4	
14	2588	103.78	1.56	KA 97	- 4	3.0	15550	479	1.93		
15	2414	96.80	1.67	KF 97	- 4	3.4	13700	422	2.2		
17	2157	86.52	1.87			2.9	16329	503	1.04	K 157R97-4	
18	1942	77.89	2.1	KAF 97	- 4	3.3	14057	433	1.20	KA 157R97-4	
20	1759	70.54	2.3			3.8	12271	378	1.38	KF 157R97-4	
17	2153	86.34	1.18			4.3	10078	332	1.57	KAF157R97-4	
18	1978	79.34	1.28	K 87	- 4	3.9	11914	367	1.03		
20	1757	70.46	1.44	KA 87	- 4	4.4	10713	330	1.14		
23	1571	63.00	1.62	KF 87	- 4	5.0	9414	290	1.30	K 127R87-4	
25	1412	56.64	1.80			5.7	8213	253	1.49	KA 127R87-4	
29	1226	49.16	2.1	KAF 87	- 4	6.7	6980	215	1.75	KF 127R87-4	
33	1098	44.02	2.3			7.1	6590	203	1.71	KAF127R87-4	
39	911	36.52	2.8			8.6	5454	168	2.1		
25	1455	58.34	1.00			9.7	4805	148	2.3		
28	1276	51.18	1.14			6.7	6980	215	1.08	K 107R77-4	
32	1126	45.16	1.29			7.6	6136	189	1.23	KA 107R77-4	
36	998	40.04	1.46	K 77	- 4	8.6	5454	168	1.38	KF 107R77-4	
38	957	38.39	1.52	KA 77	- 4	9.7	4837	149	1.55		
41	878	35.20	1.66	KF 77	- 4	11	4383	135	1.72	KAF107R77-4	
47	770	30.89	1.89			4.8	10288	150.03	1.64	K 157	- 8
49	730	29.27	2.0	KAF 77	- 4	5.9	8423	122.83	2.0	KA 157	- 8
56	639	25.62	2.3			7.2	6833	99.65	2.5	KF 157	- 8
62	576	23.08	2.5			7.8	6338	92.42	2.7	KAF 157	- 8
71	505	20.25	2.9			5.3	9253	134.94	1.3	K 127	- 8
48	754	30.22	1.02			5.9	8399	122.60	1.5	KA 127	- 8
53	680	27.28	1.13			6.5	7556	110.13	1.6	KF 127	- 8
60	598	24.00	1.26			8.1	6143	89.43	2.0	KAF 127	- 8
64	565	22.66	1.30			7.1	6940	134.94	1.76	K 127	- 6
75	481	19.30	1.48	K 67	- 4	7.8	6299	122.60	1.94	KA 127	- 6
82	437	17.54	1.59	KA 67	- 4	8.7	5667	110.13	2.2	KF 127	- 6
95	379	15.19	1.74	KF 67	- 4	11	4599	89.43	2.7	KAF 127	- 6
109	330	13.22	1.91								
118	305	12.24	1.63	KAF 67	- 4						
138	260	10.42	1.81								
152	236	9.47	1.91								
176	204	8.20	2.02								
202	178	7.14	2.2								



K系列选型参数表:

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
5.5KW						7.5KW					
8.7	5700	110.83	1.32	K 107	- 6	1.8	36021	825	1.30	K 187R107-4	
9.7	5109	99.34	1.47	KA 107	- 6	2.0	31437	720	1.50	KA 187R107-4	
11	4612	89.36	1.63	KF 107	- 6	2.4	26808	614	1.75		
12	4190	81.46	1.79	KAF 107	- 6	1.4	45670	1046	1.03		
						1.5	41129	942	1.14	K 187R97-4	
10	4866	141.93	1.55	K 107	- 4	2.0	32179	737	1.46	KA 187R97-4	
12	4100	119.58	1.83	KA 107	- 4	2.4	27027	619	1.74		
13	3800	110.83	1.98	KF 107	- 4	2.8	22879	524	2.1		
14	3406	99.34	2.2	KAF 107	- 4	2.3	27507	630	1.09		
16	3075	89.68	2.4			2.6	24494	561	1.23	K 167R97-4	
18	2793	81.46	2.7			3.0	20914	479	1.44	KA 167R97-4	
						3.5	18425	422	1.63		
14	3558	103.78	1.14			4.0	16024	367	1.88		
15	3319	96.80	1.22	K 97	- 4	3.9	16504	378	1.03	K 157R97-4	
17	2967	86.52	1.36	KA 97	- 4	4.4	14496	332	1.17	KA 157R97-4	
18	2671	77.89	1.51	KF 97	- 4	5.0	12662	290	1.34	KF 157R97-4	
20	2419	70.54	1.67	KAF 97	- 4					KAF 157R97-4	
23	2145	62.55	1.88			5.8	11046	253	1.11	K 127R87-4	
25	1939	56.55	2.1			6.8	9387	215	1.30	KA 127R87-4	
30	1643	47.93	2.5			7.2	8863	203	1.38	KF 127R87-4	
						8.7	7335	168	1.67	KAF 127R87-4	
17	2960	86.34	1.37			9.9	6462	148	1.89		
18	2720	79.34	1.49	K 87	- 4	4.4	15382	164.44	2.0	K 167 - 8	
20	2416	70.46	1.67	KA 87	- 4	5.3	12623	135.38	2.4	KA 167 - 8	
23	2160	63.00	1.87	KF 87	- 4						
25	1942	56.64	2.1	KAF 87	- 4	5.8	11537	164.44	2.61	K 167 - 6	
29	1686	49.16	1.51			7.1	9467	135.38	3.18	KA 167 - 6	
33	1509	44.02	1.68			6.4	10522	150.03	1.6	K 157 - 6	
39	1252	36.52	2.0			7.8	8614	122.83	2.0	KA 157 - 6	
46	1076	31.39	2.4			9.6	6989	99.65	2.4	KF 157 - 6	
52	956	27.88	2.7			10	6482	92.42	2.6	KAF 157 - 6	
						12	5593	79.75	3.0		
36	1373	40.04	1.06	K 77	- 4	7.1	9464	134.94	1.29	K 127 - 6	
47	1059	30.89	1.38	KA 77	- 4	7.8	8590	122.48	1.42	KA 127 - 6	
49	1004	29.27	1.45	KF 77	- 4	8.7	7727	110.18	1.58	KF 127 - 6	
56	878	25.62	1.66	KAF 77	- 4	11	6272	89.43	1.95	KAF 127 - 6	
62	791	23.08	1.84								
71	694	20.25	2.0			10	6736	146.07	1.81		
81	613	17.87	2.2			11	6223	134.94	1.96	K 127 - 4	
91	543	15.84	2.4			12	5648	122.60	2.2	KA 127 - 4	
107	464	13.52	2.7			13	5081	110.13	2.4	KF 127 - 4	
117	424	12.36	2.2			16	4124	89.43	3.0	KAF 127 - 4	
133	371	10.81	2.5			18	3805	82.52	3.2		
						21	3272	70.95	3.7		
75	662	19.30	1.08	K 67	- 4	10	6545	141.93	1.15		
82	601	17.54	1.16	KA 67	- 4	12	5514	119.58	1.36		
95	521	15.19	1.26	KF 67	- 4	13	5111	110.83	1.47		
109	453	13.22	1.39	KAF 67	- 4	15	4581	99.34	1.64	K 107 - 4	
118	420	12.24	1.19			16	4136	89.68	1.82	KA 107 - 4	
138	357	10.42	1.32			18	3757	81.46	2.00	KF 107 - 4	
152	325	9.47	1.39			20	3333	72.27	2.3	KAF 107 - 4	
176	281	8.20	1.47			22	3024	65.58	2.5		
202	245	7.14	1.61			26	2599	56.37	2.9		
						30	2269	49.20	3.2		
109	454	13.25	1.06	K 57	- 4	35	1925	41.74	3.6		
121	409	11.92	0.95	KA 57	- 4	40	1682	36.48	4.0		
128	386	11.26	1.01	KF 57	- 4						
150	329	9.59	1.16	KAF 57	- 4						
165	299	8.71	1.23								
191	259	7.55	1.33								
219	225	6.57	1.44								



K系列选型参数表:

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
11.0KW						15KW					
72	1370	20.25	1.03			35	3862	41.87	1.05		
82	1209	17.87	1.13			38	3532	38.3	1.14		
92	1071	15.84	1.23	K 77	-4	43	3157	34.23	1.28	K 97	-4
108	914	13.52	1.38	KA 77	-4	47	2843	30.82	1.42	KA 97	-4
118	836	12.36	1.12	KF 77	-4	52	2574	27.91	1.57	KF 97	-4
135	731	10.81	1.27	KAF 77	-4	59	2283	24.75	1.77	KAF 97	-4
153	645	9.54	1.37			65	2063	22.37	1.96		
173	572	8.46	1.46			77	1749	18.96	2.3		
202	488	7.22	1.57			88	1527	18.56	2.6		
15KW						18.5KW					
2.8	44884	514	1.05	K 187R107-4 KA187R107-4		59	2298	24.92	1.10		
3.3	39208	449	1.20			65	2067	22.41	1.23		
4.0	31873	365	1.47			75	1794	19.45	1.41		
5.4	23403	268	2.0			84	1607	17.42	1.58	K 87	-4
4.7	27332	313	1.10	K 167R107-4 KA167R107-4		92	1471	15.95	1.15	KA 87	-4
5.3	23839	273	1.26			101	1333	14.45	1.48	KF 87	-4
5.8	21831	250	1.38			116	1158	12.56	2.2	KAF 87	-4
6.7	19037	218	1.58			131	1027	11.13	1.37		
7.2	17727	203	1.70			147	919	9.96	1.53		
7.9	16155	185	1.86			177	763	8.27	1.73		
9.0	14234	163	2.1			203	663	7.19	1.84		
7.9	16068	184	1.05	K 157R107-4		18.5KW					
9.4	13535	155	1.25	KA 157R107-4		4.0	39043	365	1.20	K 187R107-4	
12	11003	126	1.54	KF 157R107-4		5.5	28667	268	1.64	KA187R107-4	
13	9606	110	1.76	KAF157R107-4		6.5	24281	227	1.9		
5.4	25096	180.78	1.87	K 187	-6	5.4	29202	273	1.03		
6.0	22285	160.53	2.1	KA 187	-6	5.9	26742	250	1.12		
7.2	18793	135.38	1.60	K 167	-6	6.7	23319	218	1.29		
8.8	15324	110.39	1.96	KA 167	-6	7.2	21714	203	1.39	K 167R107-4	
7.9	16990	122.39	1.00	K 157	-6	7.9	19789	185	1.52	KA167R107-4	
9.7	13833	99.65	1.22	KA 157	-6	9.0	17436	163	1.73		
10	12830	92.42	1.32	KF 157	-6	11	14868	139	2.0		
12	11071	79.75	1.53	KAF 157	-6	12	12943	121	2.3		
14	9770	70.38	1.73			9.5	16580	155	1.02	K 157R107-4	
9.7	13837	150.03	1.22	K 157	-4	12	13478	126	1.26	KA 157R107-4	
12	11329	122.83	1.49	KA 157	-4	13	11766	110	1.44	KF 157R107-4	
15	9191	99.65	1.84	KF 157	-4					KAF157R107-4	
16	8524	92.42	2.0	KAF 157	-4	5.4	30951	180.78	1.52		
18	7355	79.75	2.3			6.0	27484	160.53	1.71	K 187	-6
12	11307	122.60	1.08			6.7	24745	144.53	1.9	KA 187	-6
13	10157	110.13	1.20			7.4	22317	130.35	2.1		
16	8248	89.43	1.48	K 127	-4	8.1	20424	180.78	2.3		
18	7611	82.52	1.61	KA 127	-4	9.2	18136	160.53	2.6	K 187	-4
21	6544	70.95	1.87	KF 127	-4	10	16328	144.53	2.9	KA 187	-4
23	5774	62.60	2.1	KAF 127	-4	11	14726	130.35	3.2		
27	4987	54.07	2.5			11	15195	134.5	1.98	K 167	-4
31	4410	47.82	2.8			13	12471	110.39	2.4	KA 167	-4
18	7513	81.46	1.00			17	9851	87.20	3.1		
20	6665	72.27	1.13			11	15823	92.42	1.08	K 157	-6
22	6048	65.58	1.24			12	13654	79.75	1.24	KA 157	-6
26	5199	56.37	1.45	K 107	-4	14	12050	70.38	1.4	KF 157	-6
30	4538	49.2	1.62	KA 107	-4					KAF 157	-6
35	3850	41.74	1.80	KF 107	-4	12	13827	122.39	1.22		
40	3365	36.48	2.0	KAF 107	-4	15	11258	99.65	1.50		
45	2972	32.22	2.3			16	10441	92.42	1.62	K 157	-4
47	2844	30.84	2.2			18	9010	79.75	1.88	KA 157	-4
51	2637	28.59	2.6			21	7951	70.38	2.1	KF 157	-4
						24	6894	61.02	2.5	KAF 157	-4
						27	6133	54.29	2.8		
						31	5286	46.79	3.2		
						39	4295	38.02	3.9		



K系列选型参数表:

K select type parameter table:

输出转速	输出扭矩	传动比	使用系数	型号	极数	输出转速	输出扭矩	传动比	使用系数	型号	极数				
Na (r/min)	Ma (Nm)	i	fB	Type	P	Na (r/min)	Ma (Nm)	i	fB	Type	P				
7.5KW						11.0KW									
17	3990	86.52	1.01	K 97	-4	5.9	16740	164.44	1.80	K	167	-6			
19	3592	77.89	1.13			7.2	13782	135.38	2.2	KA	167	-6			
21	3253	70.54	1.24			8.9	11122	164.44	2.7	K	167	-4			
23	2884	62.55	1.40										11	9158	135.38
26	2608	56.55	1.55			5.9	16615	122.83	1.02	K	157	-8			
30	2210	47.93	1.83			7.3	13480	99.65	1.26	KA	157	-8			
35	1931	41.87	2.1			KAF 97	-4	7.9	12502	92.42	1.35	KF	157	-8	
38	1766	38.30	2.3			K 87	-4	9.2	10788	79.75	1.57	KAF	157	-8	
43	1579	34.23	2.6	6.5	15273			150.03	1.11	K	157	-6			
30	2267	49.16	1.12	7.9	12504			122.83	1.35	KA	157	-6			
				9.7	10144			99.65	1.67	KF	157	-6			
				10	9408			92.42	1.80	KF	157	-6			
				12	8119			79.75	2.1	KAF	157	-6			
				9.7	10147			150.03	1.67	K	157	-4			
				12	8308			122.83	2.0	KA	157	-4			
				15	6740	99.65	2.5	KF	157	-4					
				16	6251	92.42	2.7	KAF	157	-4					
47	1424	30.89	1.02	K 77	-4	11	9127	134.94	1.34	K	127	-4			
50	1350	29.27	1.08			12	8295	122.60	1.47	KA	127	-4			
57	1181	25.62	1.23			13	7449	110.13	1.64						
63	1064	23.08	1.37			16	6049	89.43	2.0	KF	127	-4			
72	934	20.25	1.56			18	5581	82.52	2.2	KAF	127	-4			
82	824	17.87	1.65			21	4799	70.95	2.5						
92	730	15.84	1.80			13	7496	110.83	1.00	K 107	-4				
108	623	13.52	2.0			15	6719	99.34	1.12						
118	570	12.36	1.65	16	6066	89.68	1.24								
135	499	10.81	1.87	18	5510	81.46	1.36								
153	440	9.54	2.0	20	4888	72.27	1.54								
173	390	8.46	2.1	22	4435	65.58	1.70								
202	333	7.22	2.3	26	3813	56.37	1.97								
11.0KW				K 187R107-4	-4	30	3328	49.2	2.2			KAF	107	-4	
						35	2823	41.74	2.5						
						40	2467	36.48	2.7	26	3825	56.55	1.06	K 97	-4
						26	3825	56.55	1.06	30	3242	47.93	1.25		
						30	3242	47.93	1.25	35	2832	41.87	1.43		
						35	2832	41.87	1.43	38	2590	38.3	1.56		
						38	2590	38.3	1.56	43	2315	34.23	1.75		
						43	2315	34.23	1.75	47	2058	30.82	1.94		
47	2058	30.82	1.94	52	1888	27.91	2.1								
52	1888	27.91	2.1	59	1674	24.75	2.4	K 87	-4						
59	1674	24.75	2.4	65	1513	22.37	2.7								
65	1513	22.37	2.7	47	2123	31.39	1.20								
47	2123	31.39	1.20	52	1886	27.88	1.30								
52	1886	27.88	1.30	59	1685	24.92	1.39								
59	1685	24.92	1.39	65	1516	22.41	1.43								
65	1516	22.41	1.43	75	1315	19.46	1.64								
75	1315	19.46	1.64	84	1178	17.42	1.76			K 87	-4				
84	1178	17.42	1.76	92	1079	15.95	1.57								
92	1079	15.95	1.57	101	977	14.45	2.0								
101	977	14.45	2.0	116	849	12.56	2.2								
116	849	12.56	2.2	131	753	11.13	1.9								
131	753	11.13	1.9	147	674	9.96	2.1								
147	674	9.96	2.1	177	559	8.27	2.4								
177	559	8.27	2.4	203	486	7.19	2.5								
203	486	7.19	2.5	K 167	-8										
8.7	10758	168	1.14			KA 167	-8								
9.9	9478	148	1.29												
5.4	18313	135.38	1.64												
6.6	14932	110.38	2.0												



K系列选型参数表:

K select type parameter table:

输出转速	输出扭矩	传动比	使用系数	型号	极数	输出转速	输出扭矩	传动比	使用系数	型号	极数				
Na (r/min)	Ma (Nm)	i	fB	Type	P	Na (r/min)	Ma (Nm)	i	fB	Type	P				
18.5KW						22KW									
16	10103	89.43	1.21	K 127	-4	8.1	24288	180.78	1.94	K 187	-4				
18	9323	82.52	1.31			9.2	21567	160.53	2.2			KA 187	-4		
21	8016	70.95	1.52			10	19418	144.53	2.4						
23	7072	62.60	1.73			11	17512	130.35	2.7	K 167	-4				
27	6109	54.07	2.0			11	18070	134.5	1.66						
31	5403	47.82	2.3			13	14831	110.39	2.0						
37	4540	40.19	2.7			17	11715	87.20	2.6						
41	4121	36.48	3.0			19	10460	77.86	2.9						
47	3544	31.36	3.4			K 107	-4	12	16237	79.75	1.04	KA 157	-6		
53	3127	27.67	3.9											14	14330
22	7409	65.58	1.01	16	12424									61.02	1.36
26	6368	56.37	1.18	12	16502									122.83	1.03
30	5558	49.2	1.35	15	13388			99.65	1.26	K 157	-4				
35	4716	41.74	1.47	16	12417			92.42	1.36						
40	4121	36.48	1.64	18	10714			79.75	1.58						
46	3640	32.22	1.86	21	9456			70.38	1.79						
48	3484	30.84	1.83	24	8198			61.02	2.1						
51	3230	28.59	2.1	27	7294			54.29	2.3						
57	2931	25.94	2.3	31	6286	46.79	2.7								
66	2519	22.30	2.7	39	5108	38.02	3.3								
76	2199	19.46	3.1	K 97	-4	16	12015	89.43	1.02			K 127	-4		
89	1865	16.51	3.6			18	11087	82.52	1.10						
48	3482	30.82	1.16			21	9532	70.95	1.28						
53	3153	27.91	1.28			23	8410	62.60	1.45						
59	2796	24.75	1.45			27	7264	54.07	1.68						
66	2527	22.37	1.60			31	6425	47.82	1.90						
78	2142	18.96	1.9			37	5400	40.19	2.3						
89	1871	16.56	2.2			40	4901	36.48	2.5						
106	1565	13.85	2.6			47	4215	31.36	2.9						
123	1355	11.99	2.7			53	3719	27.67	3.3						
84	1968	17.42	1.05	K 87	-4	61	3212	23.90	3.8						
102	1633	14.45	1.21			70	2841	21.14	4.3						
117	1419	12.56	1.32			30	6610	49.20	1.11						
132	1257	11.13	1.12			35	5608	41.74	1.23						
148	1125	9.96	1.25			40	4901	36.48	1.38						
178	934	8.27	1.41			46	4329	32.22	1.56						
204	812	7.19	1.50			48	4143	30.84	1.54						
22KW						51	3841	28.59	1.76	K 107	-4				
4.0	46429	365	1.01	57	3485	25.94	1.94								
5.5	34091	268	1.38	66	2996	22.30	2.3								
6.5	28875	227	1.63	76	2614	19.46	2.6								
7.4	25313	199	1.86	89	2218	16.51	3.0								
8.8	21370	168	2.2	102	1939	14.43	3.3								
6.7	27730	218	1.08	109	1815	13.51	2.2								
7.2	25822	203	1.16	125	1584	11.79	2.6								
7.9	23533	185	1.28	147	1343	10	2.9								
9.0	20734	163	1.45	K 167R107-4	KA167R107-4	53	3750	27.91	1.08	K 97	-4				
11	17681	139	1.70			59	3325	24.75	1.22						
12	15392	121	2.0			66	3005	22.37	1.34						
						78	2547	18.96	1.59						
12	16028	126	1.06			89	2225	16.56	1.82						
13	13992	110	1.21			106	1861	13.85	2.2						
						123	1611	11.99	2.3						
5.4	36807	180.78	1.28			K 187	-6	137	1439			10.71	1.87		
6.0	32684	160.53	1.44					164	1202			8.95	2.1		
6.7	29427	144.53	1.60												
7.4	26540	130.35	1.77												
8.6	23044	113.18	2.0												
10.0	20000	100.00	2.2												



K系列选型参数表:

K select type parameter table:

输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P	输出转速 Na (r/min)	输出扭矩 Ma (Nm)	传动比 i	使用系数 fB	型号 Type	极数 P
22KW						37KW					
102	1941	14.45	1.02	K 87	-4	7.4	42285	199	1.11	K 187R107-4	
117	1687	12.56	1.11		-4	8.8	35698	168	1.32	KA 187R107-4	
132	1495	11.13	0.94		-4						
148	1338	9.96	1.05		-4	11	29536	139	1.02	K 167R107-4	
178	1111	8.27	1.18		-4	12	25711	121	1.17	KA 167R107-4	
204	966	7.19	1.27	KAF 87	-4						
30KW						8.2	40572	180.78	1.16	K 187	-4
6.5	41587	227	1.13	K 187R107-4		8.9	38268	166.06	1.26		-4
7.4	36458	199	1.29			10	32436	144.53	1.45		-4
8.8	30778	168	1.5			11	29395	130.98	1.60		-4
				KA 187R107-4		13	25400	113.18	1.85	KA 187	-4
9.0	29862	163	1.01	K 167R107-4		14	23046	102.69	2.0		
11	25465	139	1.18			17	19853	88.46	2.4		
12	22168	121	1.36			14	24559	109.43	1.22	K 167	-4
8.1	33120	180.78	1.42	K 187	-4	17	19646	87.54	1.53		-4
8.9	30423	166.06	1.54		-4	19	17828	78.44	1.69		-4
10	26478	144.53	1.78		-4	22	15301	68.18	2.0		-4
11	23996	130.98	1.96		-4	24	13582	60.52	2.2		-4
13	20735	113.18	2.3	KA 187	-4	35	9592	42.74	3.1		
14	18813	102.69	2.5			21	15795	70.38	1.07	K 157	-4
17	16206	88.46	2.9			24	13694	61.02	1.24		-4
13	20048	109.43	1.50	K 167	-4	27	12184	54.29	1.39		-4
17	15975	87.20	1.88		-4	32	10501	46.79	1.61		-4
19	14554	79.44	2.1		-4	39	8533	38.02	1.98		-4
22	12427	67.83	2.4	KA 167	-4	47	7025	31.30	2.4	KAF 157	-4
24	11088	60.52	2.7			27	12135	54.07	1.01		
16	16932	92.42	1.00	K 157	-4	31	10732	47.82	1.14	K 127	-4
18	14611	79.75	1.16		-4	37	9020	40.19	1.35		-4
21	12894	70.38	1.31		-4	41	8187	36.48	1.49		-4
24	11179	61.02	1.51		-4	47	7040	31.36	1.74		-4
27	9946	54.29	1.70		-4	53	6212	27.67	1.97		-4
31	8572	46.79	1.97	KF 157	-4	62	5366	23.90	2.3	KA 127	-4
39	6965	38.02	2.4	KAF 157	-4	62	5366	23.90	2.3	KF 127	-4
47	5734	31.30	3.0		-4	70	4747	21.14	2.6	KF 127	-4
23	11469	62.60	1.07	K 127	-4	83	3988	17.77	3.1	KAF 127	-4
27	9906	54.07	1.23		-4	103	3220	14.35	3.5		-4
31	8761	47.82	1.39		-4	116	2870	12.78	2.8		
37	7363	40.19	1.66		-4	138	2410	10.74	3.1		
40	6683	36.48	1.83		-4	171	1948	8.68	3.5		
47	5747	31.36	2.1	KAF 127	-4	52	6416	28.59	1.05	K 107	-4
53	5071	27.67	2.4		-4	57	5822	25.94	1.16		-4
61	4380	23.90	2.8			66	5005	22.3	1.35		-4
40	6683	36.48	1.01	K 107	-4	76	4367	19.46	1.55		-4
46	5903	32.22	1.08		-4	90	3705	16.51	1.79		-4
51	5238	28.59	1.29		-4	103	3238	14.43	2.00	KA 107	-4
57	4752	25.94	1.42		-4	110	3032	13.51	1.33	KF 107	-4
66	4085	22.30	1.66		-4	126	2646	11.79	1.53	KAF 107	-4
76	3565	19.46	1.90	KA 107	-4	148	2244	10.00	1.75		-4
89	3025	16.51	2.19	KF 107	-4	169	1961	8.74	1.95		
102	2644	14.43	2.45	KAF 107	-4	45KW					
109	2475	13.51	1.63		-4	8.8	43416	168	1.08	K 187R107-4	
125	2160	11.79	1.87							KA 187R107-4	
147	1832	10.00	2.15			8.9	45326	166.06	1.04	K 187	-4
168	1601	8.74	2.39			10	39449	144.53	1.19		-4
78	3474	18.96	1.16	K 97	-4	11	35751	130.98	1.31		-4
89	3034	16.56	1.33		-4	13	30892	113.18	1.52		-4
106	2537	13.85	1.59		-4	14	28029	102.69	1.68		-4
123	2197	11.99	1.66		-4	17	24145	88.46	1.9		-4
137	1962	10.71	1.37		-4	20	20291	74.34	2.3		
164	1640	8.95	1.52	KAF 97	-4						



K系列选型参数表:

K select type parameter table:

输出转速	输出扭矩	传动比	使用系数	型号	极数	输出转速	输出扭矩	传动比	使用系数	型号	极数		
Na	Ma	i	fB	Type	P	Na	Ma	i	fB	Type	P		
(r/min)	(Nm)					(r/min)	(Nm)						
45KW						55KW							
14	29869	109.43	1.01	K 167	-4	47	10465	31.36	1.17	K 127	-4		
17	23894	87.54	1.26			53	9234	27.67	1.32				
19	21683	79.44	1.42			62	7976	23.90	1.53				
22	18610	68.18	1.62			70	7056	21.14	1.73				
24	16519	60.52	1.82			83	5928	17.77	2.06				
29	14079	51.58	2.1			103	4787	14.35	2.38				
35	11666	42.74	2.6	KA 167	-4	116	4267	12.78	1.88	KAF 127	-4		
24	16655	61.02	1.02			138	3583	10.74	2.1				
27	14818	54.29	1.14			171	2896	8.68	2.3				
32	12771	46.79	1.32			75KW							
39	10378	38.02	1.63			14	47016	103.35	1.00	K 187	-4		
47	8543	31.30	2.0			17	40242	88.46	1.17				
54	7539	27.62	2.2	20	33818	74.34	1.39						
62	6537	23.95	2.6	23	29283	64.37	1.61						
69	5817	21.31	2.9	28	24402	53.64	1.9						
81	5014	18.37	3.4	32	20803	45.73	2.3						
37	10970	40.19	1.11	K 127	-4	24	27531	60.52	1.09	K 167	-4		
41	9957	36.48	1.23			29	23496	51.65	1.28				
47	8562	31.36	1.43			34	19598	43.08	1.53				
53	7555	27.67	1.62			41	16595	36.48	1.81				
62	6526	23.90	1.87			46	14616	32.13	2.1				
70	5773	21.14	2.1			52	13042	28.67	2.3				
83	4850	17.77	2.5	KAF 127	-4	61	11114	24.43	2.7	K 157	-4		
106	3917	14.35	2.9			47	14239	31.30	1.19				
116	3491	12.78	2.3	54	12565	27.62	1.35						
138	2931	10.74	2.6	62	10895	23.95	1.55						
171	2369	8.68	2.9	69	9694	21.31	1.75						
66	6087	22.30	1.11	81	8357	18.37	2.0						
76	5312	19.46	1.27	99	6787	14.92	2.5						
90	4506	16.51	1.47	117	5755	12.65	2.9	K 127	-4				
103	3939	14.43	1.64	62	10877	23.90	1.12						
110	3688	13.51	1.10	70	9621	21.14	1.27						
126	3218	11.79	1.26	83	8084	17.77	1.51						
148	2729	10.00	1.44	103	6528	14.35	1.74						
169	2386	8.74	1.60	116	5900	12.78	1.36						
55KW						138	5886			10.74	1.54	KAF 127	-4
10	45904	145.33	1.02	171	3949	8.68	1.72						
11	41371	130.98	1.14	90KW									
13	36261	114.80	1.30	19	42242	77.38	1.11						
14	32436	102.69	1.45	K 187	-4	23	35139	64.37	1.34				
17	29511	88.46	1.59			28	28282	53.64	1.61				
20	24800	74.34	1.90			31	26427	48.41	1.8				
23	21474	64.37	2.19			34	23769	43.59	2.0				
17	29204	87.54	1.03			38	21170	38.78	2.2				
19	25974	77.86	1.16			29	28157	51.58	1.07				
22	22745	68.18	1.32	K 167	-4	35	23332	52.74	1.29				
24	20263	60.74	1.48			40	19953	36.55	1.51				
29	17207	51.58	1.75			45	17807	32.62	1.69				
35	14258	42.74	2.1			52	15651	28.67	1.92				
41	12170	36.48	2.5			61	13336	24.43	2.3				
32	15609	46.79	1.08			73	11054	20.25	2.7				
39	12684	38.02	1.33	K 157	-4	86	9433	17.28	3.2				
47	10442	31.30	1.62			54	15078	27.62	1.12				
54	9214	27.62	1.84			62	13074	23.95	1.29				
62	7990	23.95	2.1			69	11633	21.31	1.45				
69	7109	21.31	2.4			81	10028	18.37	1.69				
81	6128	18.37	2.8			99	8145	14.92	2.1				
99	4977	14.92	3.4	KAF 157	-4	117	6906	12.65	2.5				
117	4220	12.65	3.8			54	15078	27.62	1.12				
32	15609	46.79	1.08			62	13074	23.95	1.29				
39	12684	38.02	1.33			69	11633	21.31	1.45				
47	10442	31.30	1.62	81	10028	18.37	1.69						
54	9214	27.62	1.84	99	8145	14.92	2.1						
62	7990	23.95	2.1	117	6906	12.65	2.5						
69	7109	21.31	2.4										
81	6128	18.37	2.8										
99	4977	14.92	3.4										
117	4220	12.65	3.8										



K系列选型参数表:

输出转速	输出扭矩	传动比	使用系数	型号	极数
Na (r/min)	Ma (Nm)	i	fB	Type	P
90KW					
70	11546	21.14	1.06	K 127	-4
83	9701	17.77	1.26		
103	7834	14.35	1.45		
116	6982	12.78	1.15		
138	5863	10.74	1.28		
171	4738	8.68	1.43	KAF 127	-4
110KW					
21	46173	69.67	1.02	K 187	-4
24	41853	63.14	1.12		
33	30307	45.73	1.55		
35	28332	42.75	1.66		
38	26178	39.50	1.80		
42	23441	35.37	2.0	KA 187	-4
53	18610	28.08	2.5		
35	28325	42.74	1.06		
41	24176	36.48	1.24	K 167	-4
46	21618	32.62	1.39		
54	18378	27.73	1.64		
61	16191	24.43	1.86		
74	13420	20.25	2.2		
86	11452	17.28	2.6	KA 167	-4
62	15872	23.95	1.07		
70	14123	21.31	1.20		
81	12174	18.37	1.39		
100	9888	14.92	1.71		
118	8384	12.65	2.0	KAF 157	-4
132KW					
28	42659	53.64	1.10	K 187	-4
31	38499	48.41	1.22		
34	34666	43.59	1.36		
38	30841	38.78	1.52		
45	26570	33.41	1.77		
53	22331	28.08	2.1	KA 187	-4
61	19333	24.31	2.3		
74	16112	20.26	2.6		
86	13734	17.27	2.8		
41	29012	36.48	1.04	K 167	-4
46	25942	32.62	1.16		
54	22053	27.73	1.36		
61	19429	24.43	1.55		
74	16104	20.25	1.87		
86	13742	17.25	2.2	KA 167	-4
70	16947	21.31	1.00		
81	14609	18.37	1.16		
100	11866	14.92	1.43		
118	10060	12.65	1.59		
160KW					
33	44082	45.73	1.07	K 187	-4
42	34096	35.37	1.38		
47	30693	31.84	1.53		
61	23434	24.31	1.9		
74	19530	20.26	2.1		
86	16648	17.27	2.3	KA 187	-4


K select type parameter table:

输出转速	输出扭矩	传动比	使用系数	型号	极数	
Na (r/min)	Ma (Nm)	i	fB	Type	P	
160KW						
62	23338	24.21	1.29	K	167	-4
73	19800	20.54	1.52		167	-4
86	16657	17.28	1.81	KA	167	-4
100	14382	14.92	1.18	K	157	-4
				KA	157	-4
				KF	157	-4
				KAF	157	-4
200KW						
45	40258	33.41	1.17	K	187	-4
47	38366	31.84	1.23			
59	30618	25.41	1.54			
74	24413	20.26	1.69	KA	187	-4
86	20810	17.27	1.87			
61	29437	24.43	1.02	K	167	-4
73	24750	20.54	1.22		167	-4
86	20906	17.35	1.44	KA	167	-4
100	17978	14.92	0.94	K	157	-4
				KA	157	-4
				KF	157	-4
				KAF	157	-4
118	15243	12.65	1.05			



4.7 外形安装尺寸:

4.7 Outline and mounting dimension:

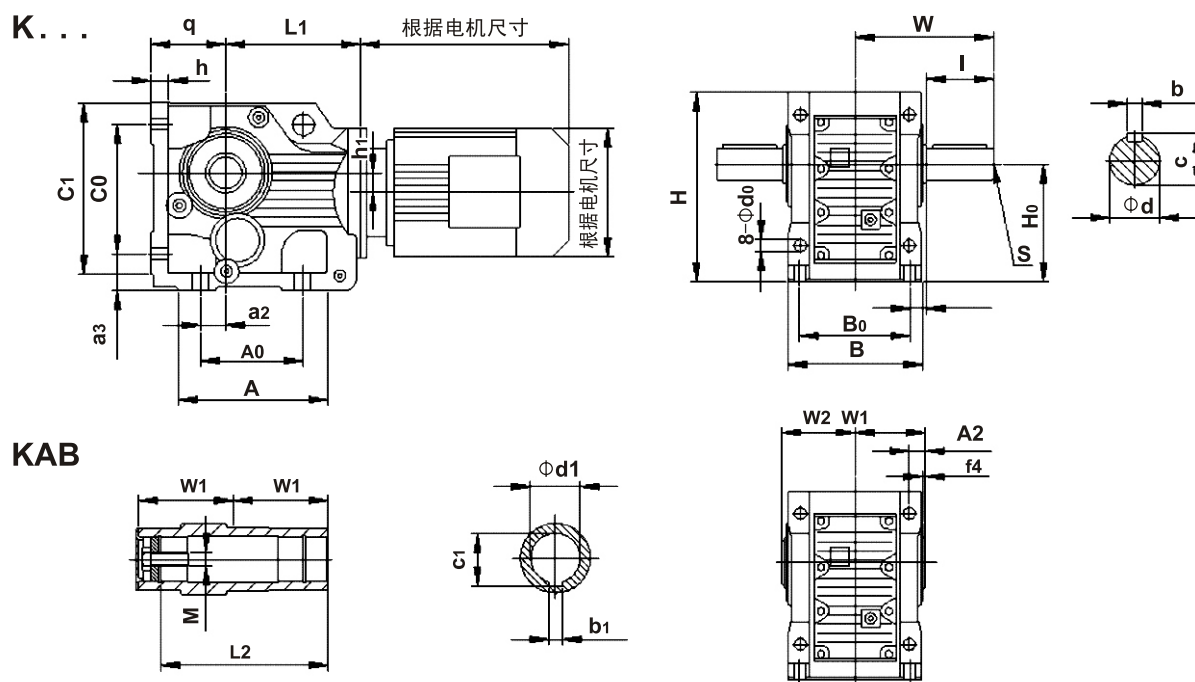


Type	安 装 尺 寸					轴 伸 尺 寸			外 形 尺 寸				
	H0	B0	C0	a3	A1	D	I	S	b	B	L1	W	A
K37	100	A0	a2	q	d0	25k6	50	M10	c	H	h	h1	C1
		100	115	32	10				8	120	139	110	150
		110	28	63	11				28	165	16	8.5	145
K47	112	120	130	37	15	30k6	60	M10	8	145	166	135	165
		130	35	71	11				33	186	18	7.2	170
K57	132	130	150	45	18	35k6	70	M12	10	157	173	153	172
		130	30	80	13.5				38	217	21	13.1	190
K67	140	140	160	45	21	40k6	80	M16	12	170	179	171	175
		120	30	90	13.5				43	228	24	20	203
K77	180	165	200	55	23.5	50k6	100	M16	14	200	202	206	205
		150	40	112	17.5				53.5	288	27	31.3	263
K87	212	180	233	70	30	60m6	120	M20	18	230	257	240	255
		180	55	132	22				64	340	32	25.9	311
K97	265	240	295	75	31	70m6	140	M20	20	290	277	291	320
		240	75	160	26				74.5	414	36	32.3	372
K107	315	270	360	95	42	90m6	170	M24	25	340	341	347	390
		280	95	200	33				95	505	40	52	455
K127	375	330	420	110	43	110m6	210	M24	28	400	390	418	460
		350	115	225	39				116	592	45	53	526
K157	450	420	500	130	37	120m6	210	M24	32	500	426	457	495
		380	140	280	39				127	705	50	71.7	634



Type	安 装 尺 寸					外 形 尺 寸					
	W1	W2	f4	A2	M	d1	C1	b1	L2	g1	
KAB47	75	78	3	15	M10X25	35H7	38.3	10	130	160	
KAB57	83	86	3	18	M16X40	40H7	43.3	12	142	160	
KAB67	90	93	3.5	20	M16X40	40H7	43.3	12	156	160	
KAB77	105	108	4	22.5	M16X40	50H7	53.8	14	183	200	
KAB87	120	123	4	30	M20X50	60H7	64.4	18	210	250	
KAB97	150	153	4	30	M20X50	70H7	74.9	20	270	300	
KAB107	175	178	2.5	40	M24X60	90H7	95.4	25	310	350	
KAB127	205	208	2.5	40	M24X60	100H7	106.4	28	370	450	
KAB157	250	253	0	40	M24X60	120H7	127.4	32	457	550	




K167 外形安装尺寸:

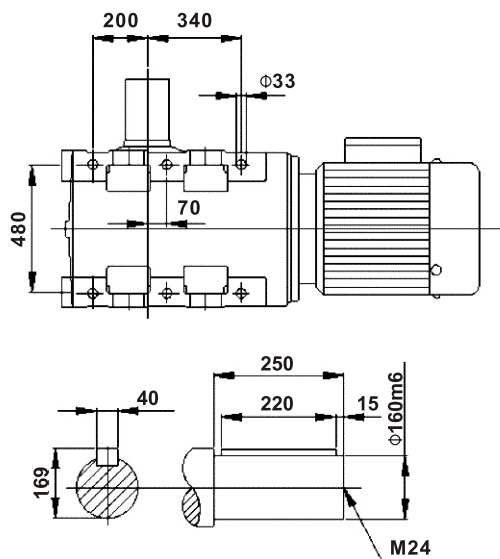





K167 Outline and mounting dimension:

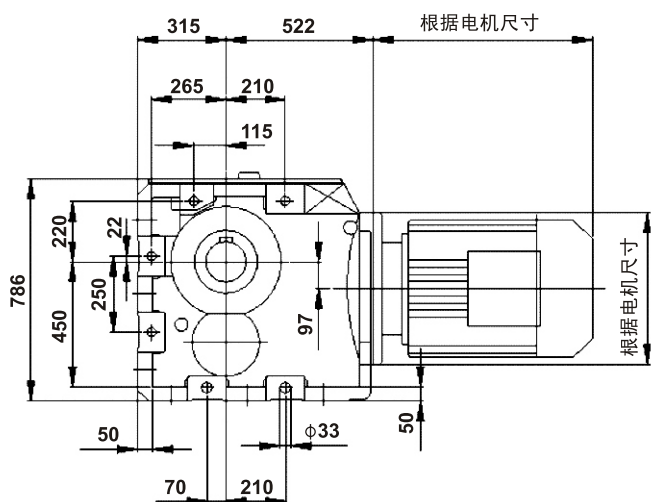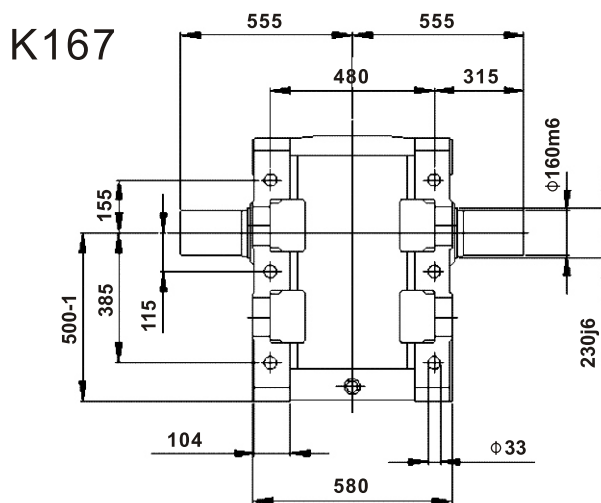

KA167




K(A)AI167


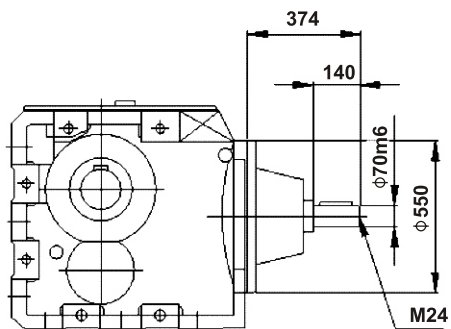





K167 外形安装尺寸:

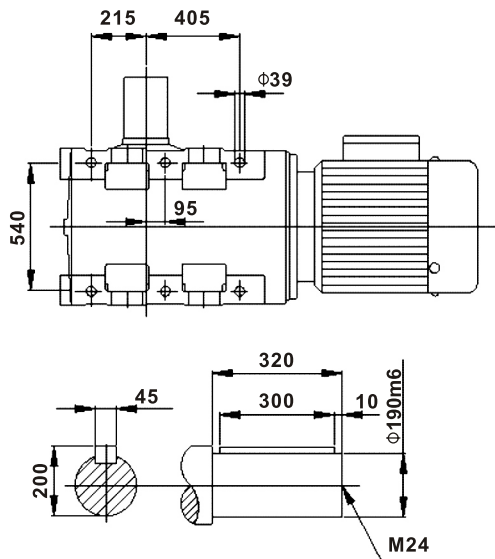





K167 Outline and mounting dimension:

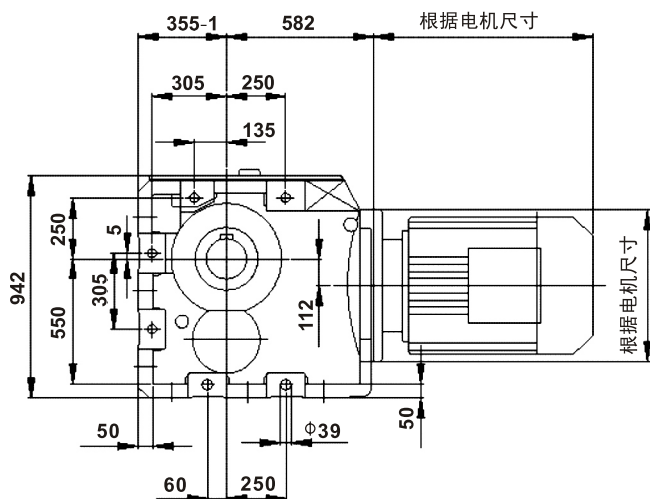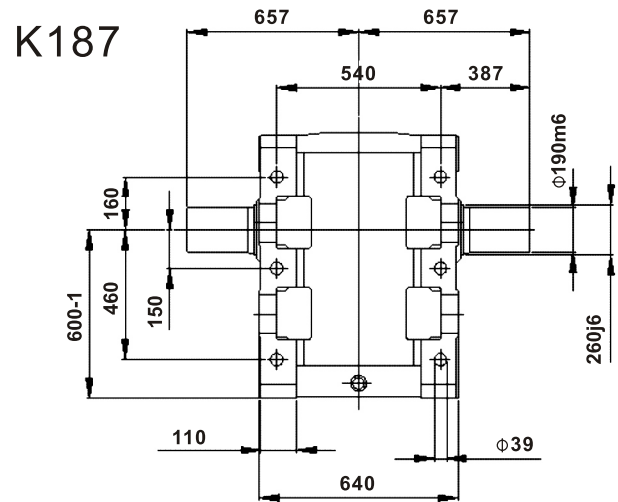

KA187



K(A)A I 187

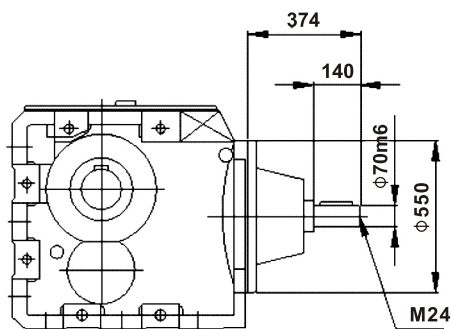





外形安装尺寸:

Outline and mounting dimension:


KF...

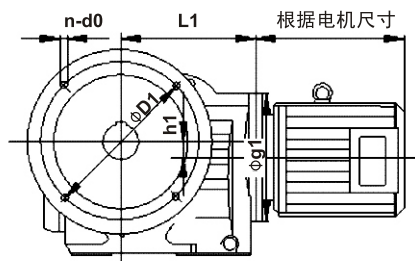



KF37-KF107




KF127-KF157

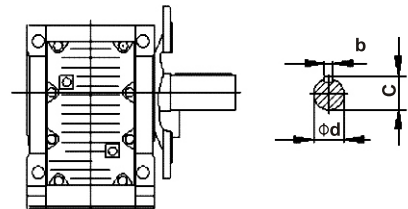


KAF...



KAF37-KAF107



KAF127-KAF157

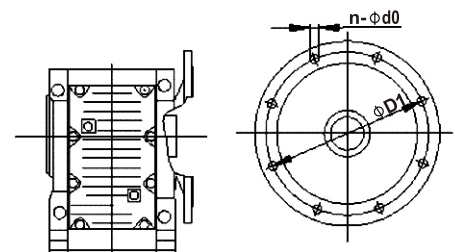


Type	安 装 尺 寸							轴 伸 尺 寸				外 形 尺 寸					
	H0	S	R	D1	n	d0	D2	b	d	l	C	L1	W	D	h1	h2	H
KF37	100	M10	3.5	130	4	9	110j6	8	25k6	50	28	139	134	160	8.5	10	164
KF47	112	M10	3.5	165	4	11	130j6	8	30k6	60	33	166	160	200	7.2	10	185
KF57	132	M12	4	215	4	13.5	180j6	10	35k6	70	38	173	177	250	13.1	15	215
KF67	140	M16	4	215	4	13.5	180j6	12	40k6	80	43	179	193	250	20	15	226
KF77	180	M16	4	265	4	13.5	230j6	14	50k6	100	53.5	202	242	300	31.3	16	286
KF87	212	M20	5	300	4	17.5	250j6	18	60m6	120	64	257	270	350	25.9	18	338
KF97	265	M20	5	400	8	17.5	350j6	20	70m6	140	74.5	277	332	450	32.3	22	414
KF107	315	M24	5	400	8	17.5	350j6	25	90m6	170	95	341	386	450	52	22	500
KF127	375	M24	5	500	8	17.5	450j6	28	110m6	210	116	390	466	550	53	25	592
KF157	450	M24	6	600	8	22	550j6	32	120m6	210	127	426	520	660	71.7	28	705






Type	安 装 尺 寸							轴 伸 尺 寸				外 形 尺 寸			
	L2	D1	R	D2	n	d0	M	b1	d1	l1	c1	D	h2	W1	g1
KAF37	105	130	3.5	110j6	4	9	M10X25	8	30H7	24	33.3	160	10	60	120
KAF47	130	165	3.5	130j6	4	11	M10X25	10	35H7	25	38.3	200	10	75	160
KAF57	142	215	4	180j6	4	13.5	M16X40	12	40H7	23.5	43.3	250	15	83	160
KAF67	156	215	4	180j6	4	13.5	M16X40	12	40H7	23	43.3	250	15	90	160
KAF77	183	265	4	230j6	4	13.5	M16X40	14	50H7	37	53.8	300	16	105	200
KAF87	210	300	5	250j6	4	17.5	M20X50	18	60H7	30	64.4	350	18	120	250
KAF97	270	400	5	350j6	8	17.5	M20X50	20	70H7	41.5	74.9	450	22	150	300
KAF107	310	400	5	350j6	8	17.5	M24X60	25	90H7	41	95.4	450	22	175	350
KAF127	370	500	5	450j6	8	17.5	M24X60	28	100H7	51	106.4	550	25	205	450
KAF157	457	600	6	550j6	8	22	M24X60	32	120H7	60	127.4	660	28	250	550



外形安装尺寸:

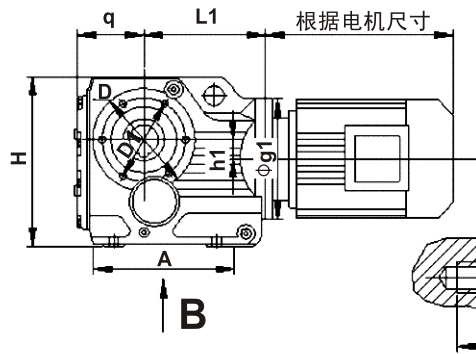

Outline and mounting dimension:

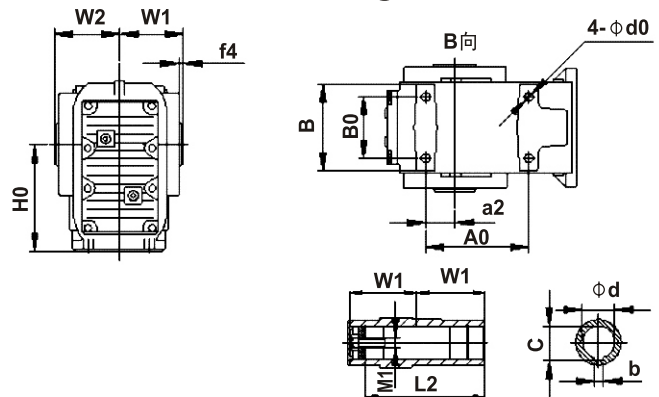

Type	安 装 尺 寸				轴 伸 尺 寸				外 形 尺 寸					
	H0	B0 a2	A0	d0	d	b c	L2	M1	B	q L1	H g1	W1 f4	h1 A	W2
KA37	100	60 35	117	M10X20	30H7	8 33.3	105	M10X25	100	71 142	164 120	60 2.5	8.5 147	63
KA47	112	70 40	140	M10X20	35H7	10 38.3	130	M12X25	110	75 166	185 160	75 3	7.2 165	78
KA57	132	88 47	152	M12X25	40H7	12 43.3	142	M16X40	122	96 173	215 160	83 3	13.1 172	86
KA67	140	88 42	152	M12X25	40H7	12 43.3	156	M16X40	130	94 179	226 160	90 3.5	20 175	93
KA77	180	102 48	170	M16X32	50H7	14 53.3	183	M16X40	154	108 202	288 200	105 4	31.3 205	108
KA87	212	118 65	225	M16X32	60H7	18 64.4	210	M20X50	170	132 257	338 250	120 4	25.9 255	123
KA97	265	160 83	248	M20X36	70H7	20 74.8	270	M20X50	226	158 277	414 300	150 4	32.3 320	153
KA107	315	190 100	290	M24X44	90H7	25 95.4	310	M24X60	266	198 354	500 350	175 2.5	52 390	178
KA127	同 KAB127													
KA157	同 KAB157													



Type	安 装 尺 寸				外 形 尺 寸						
	L5	B	C8	R	P	I	H0	d1	L4 ^{+0 -0.3}	a4	d2 ^{+0.25 +0.1}
KAT37	31	60°	10	22.5	140	20	100	10.4±0.1	36	23.5	26
KAT47	31	55°	12	22.5	160	20	112	10.4±0.1	36	30	26
KAT57	54	55°	13	29	192	18	132	16.4±0.08	60	40	40
KAT67	54	55°	13	29	200	25	140	16.4±0.08	60	45	40
KAT77	54	60°	14	29	250	25	180	16.4±0.08	60	52.5	40
KAT87	72	60°	16	41	300	30	212	25±0.08	80	60	60
KAT97	92	50°	17	41	350	40	265	25±0.08	100	70	60
KAT107	92	55°	20	41	450	45	315	25±0.08	100	74	60
KAT127	110	65°	45	70	550	7	375	40±0.08	126	60	-
KAT157	110	70°	45	70	700	2	450	40±0.08	126	50	-




外形安装尺寸:

Outline and mounting dimension:


KAZ...

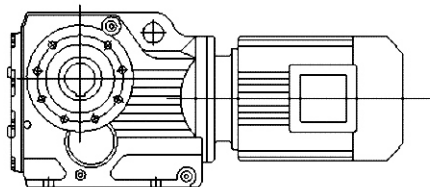


KAZ37




KAZ47




KAZ57




KAZ67




KAZ77




KAZ87




KAZ97



KAZ107



KAZ127



KAZ157




Type	安 装 尺 寸					轴伸尺寸	外 形 尺 寸		
	L1	D1	D2	M	R	I	d0	h2	D
KAT37	12	94	80j6	M8	3	9	9	11.5	110
KAT47	12	102	80j6	M8	3	8.5	9	11	120
KAT57	20	125	105j6	M12	3.5	9	13.5	12	155
KAT67	20	125	150j6	M12	3.5	8.5	13.5	12	155
KAT77	20	142	125j6	M12	3.5	10	13.5	14	170
KAT87	26	178	155j6	M16	4	11	17.5	15	215
KAT97	26	220	180j6	M16	4	14	17.5	18	260
KAT107	30	260	210j6	M20	4	8*	22	22	304
KAT127	28	300	250h6	M20	5	0	22	30	350
KAT157	36	340	190h6	M24	5	14*	26	30.5	400

注:带*表示高出法兰结合面


Note: The size with * is higher than flange section's



外形安装尺寸:

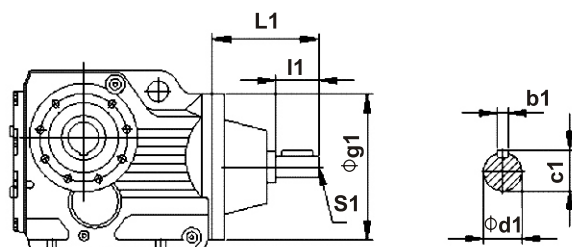

Outline and mounting dimension:

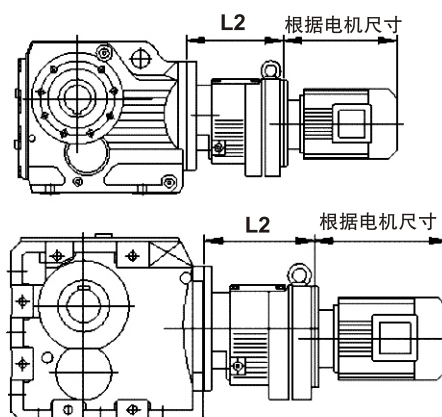

型号	d1	L1	l1	S1	c1	b1	g1
KAT37	16k6	115	40	M	18	5	120
KAT47	19k6	120	40	M6	21.5	6	160
KAT57	19k6	120	40	M6	21.5	6	160
KAT67	19k6	120	40	M6	21.5	6	160
KAT77	24k6	140	50	M8	27	8	200
KAT87	28k6	180	60	M10	31	8	250
KAT97	38k6	220	80	M12	41	10	300
KAT107	42k6	270	110	M16	45	12	350
KAT127	55m6	297	110	M20	59	16	450
KAT157	70m6	374	140	M20	74.5	20	550

型号	电机机座号	L2	L3
K. . 37R17	Y263. .	175	≤208
	Y271. .	175	≤266
	Y280. .	175	≤272
K. . 47R37	Y263. .	157	≤208
K. . 57R37	Y271. .	157	≤266
K. . 67R37	Y280. .	157	≤272
K. . 77R37	Y290. .	157	≤320
K. . 87R57	Y263. .	187	≤198
	Y271. .	187	≤266
	Y280. .	187	≤272
K. . 97R57	Y290. .	187	≤320
	Y2100L	187	≤350
	Y2112M	187	≤375
K. . 107R77	Y263. .	220	≤198
	Y271. .	220	≤266
	Y280. .	220	≤248
	Y290. .	220	≤295
K. . 127R77	Y2100L	220	≤350
	Y2112M	220	≤375
	Y2132. .	220	≤465
	Y2160M	220	≤600
型号	电机机座号	L2	L3
K. . 127R87	Y290. .	272	≤295
	Y2100L. .	272	≤320
	Y2112M	272	≤340
	Y2132. .	272	≤465
	Y2160. .	272	≤600
	Y2180. .	272	≤665
K. . 157R97	Y280. .	320	≤248
	Y290. .	320	≤295
	Y2100L	320	≤320
K. . 167R97	Y2112M	320	≤340
	Y2132. .	320	≤425
	Y2160. .	320	≤600
K. . 187R97	Y2180. .	320	≤665
	Y2200L	320	≤675
	Y2100L	355	≤320
K. . 157R107	Y2112M	355	≤340
	Y2132. .	355	≤425
	Y2160	355	≤560
K. . 167R107	Y2180	355	≤620
	Y2200L	355	≤675
	Y2225. .	355	≤740